Blueprint Collection

.

## Mannington.

Cover & Above: Outline Modular - Borough 15217 Carpet Installation - Horizontal Brick Ashlar Spacia First Collection Wood - Frosted Oak SF3W5020

Sketch Modular - Borough 15217 Carpet Installation - Monolithic Spacia First Collection Wood - Frosted Oak SF3W5020

Script Modular - Borough 15217 Installation - Horizontal Brick Ashlar 

## ECONYL® Regenerated Nylon: No waste. No new resources. Just endless possibilities.


Made from waste, ECONYL® is infinitely recyclable and can unleash endless possibilities. It's all part of the ECONYL® brand vision to make the world a better place by pioneering closed loop regeneration processes and delivering sustainable products.

ECONYL® reduces the amount of global waste by collecting both pre and post-consumer waste, including

spent carpet, fishing nets, fabrics and industrial plastic components, and regenerating this waste into new nylon that has the same quality as virgin products. For every 10,000 tons of ECONYL® raw material, we are able to save 70,000 barrels of crude oil and avoid 57,000 tons of CO<sub>2</sub> emissions. And, best of all, ECONYL® is engineered so it can be entirely regenerated again, and again—pushing ever closer to Aquafil's ultimate goal of a fiber made from 100% post-consumer waste, while maintaining ultimate standards in performance and quality.





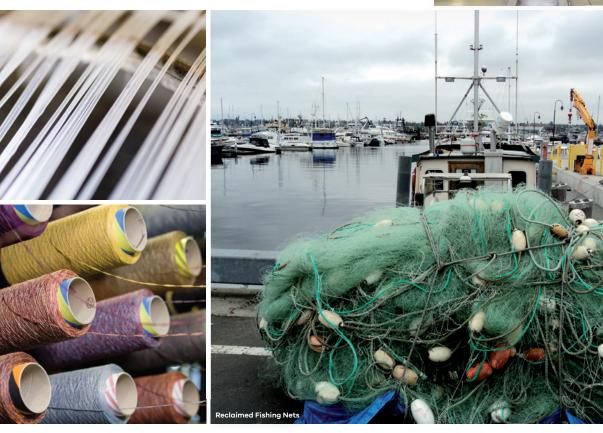



## **Blueprint Collection**

Style	Outline Modular (Non-Ortho Phthalate)	Script Modular (Non-Ortho Phthalate)	Sketch Modular (Non-Ortho Phthalate)
Construction	Textured Patterned Loop	Textured Patterned Loop	Textured Patterned Loop
Face Fiber	ECONYL® 100% Regenerated	ECONYL® 100% Regenerated	ECONYL® 100% Regenerated
	Type 6 Nylon	Type 6 Nylon	Type 6 Nylon
Dye Method	Solution	Solution	Solution
Gauge	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	8.33 (32.80 per 10 cm)	8.33 (32.80 per 10 cm)	8.33 (32.80 per 10 cm)
Density	5,538 (205.78 kg/m³)	5,538 (205.78 kg/m³)	5,538 (205.78 kg/m³)
Pile Thickness	0.091" (2.31 mm)	0.091" (2.31 mm)	0.091" (2.31 mm)
Weight	14 oz/yd² (475 g/m²)	14 oz/yd² (475 g/m²)	14 oz/yd² (475 g/m²)
Backing Type	Infinity® 2 Modular	Infinity® 2 Modular	Infinity® 2 Modular
Size	24" × 24"	24" x 24"	24" × 24"
	(60.96 x 60.96 cm)	(60.96 x 60.96 cm)	(60.96 x 60.96 cm)
Colors	8	8	8
Pattern Repeat	N/A	N/A	N/A
Packaging	6.22 yd² / 14 Tiles	6.22 yd <sup>2</sup> / 14 Tiles	6.22 yd <sup>2</sup> / 14 Tiles
Adhesive	Infinity <sup>®</sup> Adhesive	Infinity <sup>®</sup> Adhesive	Infinity <sup>®</sup> Adhesive
Installation Method	Horizontal Brick Ashlar,	Horizontal Brick Ashlar,	Horizontal Brick Ashlar,
	Monolithic, Vertical Ashlar	Monolithic, Vertical Ashlar	Monolithic, Vertical Ashlar
Testing			
Dimensional Stability (Aachen Test)	Passes		
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV		
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm <sup>2</sup>		
Smoke Density (ASTM E662)	Passes - ≤ 450		
Methenamine Pill Test (ASTM D2859)	Passes		
Hexapod (ASTM D5252) TARR	3.5		
Environmental Data			
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold		
Recycled Content	Contains recycled content		
Indoor Air Quality	CRI Green Label Plus Certified		
Product Declarations	EPD		
LEED Scoreboard	May contribute to LEED credits:		
	LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring		
	LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization -		
	Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low		
	Emitting Materials		
mindful MATERIALS	Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information		
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered		
Warranty			
	Limited Lifetime Wear & Backing		
	Limited 15 Year XGUARD® Stain Resistant		

Limited 15 Year ColorSafe® Bleach Resistant

• As with all quality carpets, slight variation in color may occur from dye lot to dye lot.

• Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.2412262 ext. 6913.

Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.

Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.

Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.

<sup>•</sup> This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.

<sup>•</sup> The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.