

# MANNINGTON

premium **rubber** flooring



## Choices that Work

Creative colors. Smart design. High-performance rubber.

**MANNINGTON**  
COMMERCIAL



# premium rubber flooring

*Rubber is formed function.*

At Mannington Commercial, we believe that our own function as a product manufacturer is to help you form creative interior environments. Our durable rubber is the answer to wear and tear, scuffs and high traffic. Engineered for superior performance, it is unsurpassed in durability, cleanability and slip resistance.

And now – shaped by Mannington Commercial to complement your design vision.

More amazing colors. Smarter design. Improved textures. All to Mannington standards of performance.

Our Premium Rubber Flooring brings high style to any floor, turns wall base into architectural accents and helps keep beautiful stairs – beautiful.

Like all of our flooring – our rubber tile, wall base, stair treads and finishing accessories bring better performance, colors and style to commercial projects.



# color choices.

Building upon Mannington's reputation for superb colors, we offer our Premium Rubber in a wide array of color choices.

Fashion forward. Designer favorites. Time-trusted neutrals. A full palette for inspired creativity.

And for full color integration across a project, tap into our Sync™ coordinated color system.

The 25 Sync™ colors are perfectly consistent across all of our rubber products including floor tile, wall base, stair tread and finishing accessories.

Please refer to the color choices section for a complete listing of all 70 colors within Mannington's premium rubber flooring products.



# choices

that Work for the environment.

At Mannington, we know that every company is only as good as its people. And its people are only as good as the choices they make.

Superior formulations, made to Mannington standards, means that our rubber flooring products have a longer life cycle, do not need waxes or finishes and require less chemical cleaning - which results in lower costs and less impact on the environment.

Smarter installation and maintenance means that less waste goes into America's landfills. And our Premium Rubber products can contribute to LEED credits.

As employees of Mannington and members of our communities, we take a hard look every day at what we call the Sum of our Choices. A comprehensive view of what we make, how we make it and how it serves our customers.



rubber  
resilient sheet  
vct / premium tile  
lvt  
hardwood  
porcelain  
carpet broadloom  
carpet modular

# coordinating product choices.

Every project is unique. And within any project a variety of products are needed to complete the space.

We stand ready to provide a full range of rubber products.

Mannington is the only commercial flooring manufacturer to offer a full range of hard and soft surfaces.

## contents

### rubber sheet & tile

### rubber & vinyl stair treads

audio spectra	08-09
colorspec	10-11
colorscape	12-13
colorfields	14-15
reset	16-17
enforcer	18-19
colorspec stair treads	20-21
colorscape stair treads	22-23
linear stair treads	24-25
stair nosings	26-27

### sculptured wall base

edge effects	29-33
--------------	-------

### rubber & vinyl wall base

optimum edge	35-37
premium edge	38-39
mannington edge	40-41

### finishing accessories

43-49

### specifications



51-53


### adhesives

54

### color choices

57-58

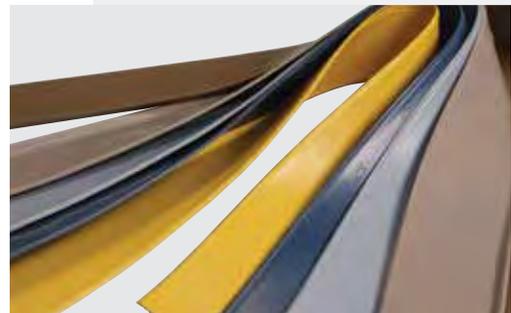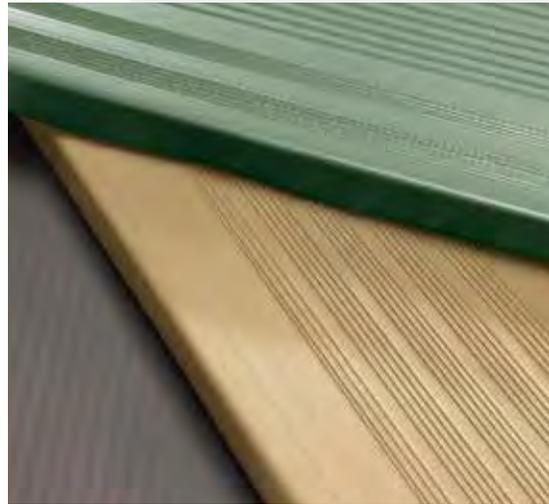

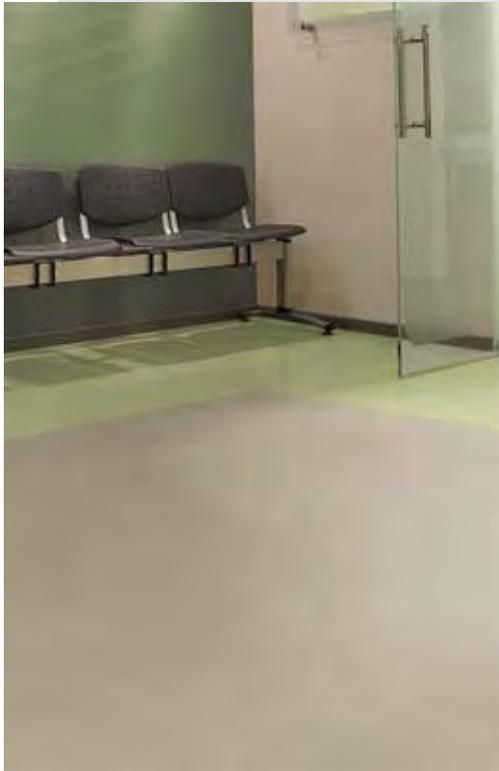

# rubber tile & stair treads

## rubber sheet & tile

audio spectra

colorspec

colorscape

colorfields

reset

enforcer

## stair treads

colorspec

colorscape

linear treads

& nosings

Better rubber, made beautiful.

Mannington Premium Rubber floor tile and stair treads are formulated with our superior rubber so they retain their amazing color, resist indentations and cracking, and are quiet underfoot.

Profile patterns that are both practical and beautiful make them easy to clean, and ensure that they remain slip resistant for years.

Built-in waxes produce a natural luster that requires no finishes or stripping, lowering maintenance costs.

Superior quality and durability – with remarkable warranties that give the peace of mind that only comes with a Mannington product.

# audio spectra<sup>TM</sup>

*Wave lengths of sounds made visual.*

Based on spectrograph readings, Audio Spectra is made up of three patterns: Silence, the spanish word Hola and the Tic Toc of a metronome.



# audio spectra™

rubber tile

Audio Spectra's three patterns are based on spectrograph readings of silence, the spanish word Hola and the Tic Toc of a metronome.

Choose from Silence, Hola or Tic Toc texture profiles.

## product attributes

- Thermoset vulcanized rubber tile
- 16 colors
- Available in 12" x 24" tiles
- ASTM F-1344, Class 1-A
- Meets guidelines established by ADA for walking surfaces and ramps

## environmental attributes

- Vinyl alternative product
- Made in the USA
- Certified under FloorScore – an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3

## performance attributes

- **Superior rubber formulation**
  - Superior indentation resistance, color retention and slip-resistance
  - Superior scratch-resistance due to low clay and high pigment content
  - Quieter underfoot
- **Built-in long lasting migrating wax**
  - No wax required, low maintenance option
  - Self-waxing feature for superior appearance retention
  - Lower life cycle costs
- **Superior profile design**
  - Profile design allows for enhanced cleanability
- **Superior warranties**
  - Limited 10-Year Wear Warranty
  - Limited 10-Year Commercial Warranty

## audio spectra™ tile profiles



silence



hola



tic toc

Note: All 3 profiles have 5/16" frame around each tile

## color choices



Reference page 57 for color choices.  
Reference page 51 for technical information.

Custom colors available.  
Contact your Mannington representative.

# colorspec™

*Dynamic, non-directional color.*

The non-directional design of ColorSpec tile unites beautiful base colors with color chips, creating an overall effect that is vivid or subtle. Allowing you to spotlight the floor, or use it to create a background for other design features.



ColorSpec is the highest quality rubber, manufactured to Mannington standards of durability and performance to resist scuffing, gouging and abrasions. A vinyl alternative product, with a natural luster that requires no waxing or stripping, reducing maintenance and reducing lifecycles costs.

ColorSpec is available in simple square or sculptured texture profiles.

### product attributes

- Thermoset vulcanized rubber tile
- 22 colors – coordinates with ColorScape
- Available in 18 1/8" x 18 1/8" tiles
- ASTM F-1344, Class 1-B
- Meets guidelines established by ADA for walking surfaces and ramps


### environmental attributes

- Vinyl alternative product
- Made in USA
- Certified under FloorScore – an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3

### performance attributes


- **Superior rubber formulation**
  - Superior indentation resistance, color retention and slip-resistance
  - Superior scratch-resistance due to low clay and high pigment content
  - Quieter underfoot
- **Built-in long lasting migrating wax**
  - No wax required, low maintenance option
  - Self-waxing feature for superior appearance retention
  - Lower life cycle costs
- **Superior profile design**
  - Profile design allows for enhanced cleanability
- **Superior warranties**
  - Limited 10-Year Wear Warranty
  - Limited 10-Year Commercial Warranty

### colorspec™ tile profiles



square


thickness – 1/8"  
size – 18 1/8" x 18 1/8" (460mm x 460mm)  
face – .025" raised profile



sculptured

thickness – 1/8"  
size – 18 1/8" x 18 1/8" (460mm x 460mm)  
face – sculptured profile

### color choices

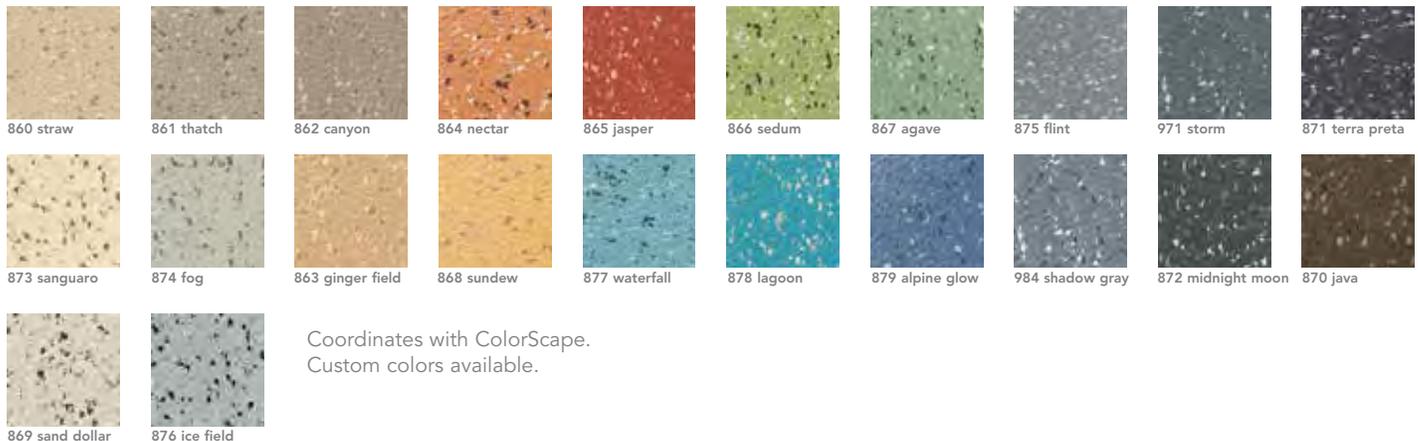

# colorscape™

*Color, without compromise.*

Creating solid planes of a single shade, or accents abounding, or fields of tonal play. In a full range of beautiful choices for any application – from healthcare and education, to offices and retail.



Our ColorScape tiles are made of the highest quality rubber, manufactured to Mannington's standards of durability and performance, to resist scuffs, gouges and abrasions. A vinyl alternative, with natural luster that requires no waxing or stripping and reduces lifecycle costs.

Choose from classic round, simple square or sculptured texture profiles.

### product attributes

- Thermoset vulcanized rubber tile
- 25 Sync™ colors
- Available in 18 1/8" x 18 1/8" tiles
- ASTM F-1344, Class 1-A
- Meets guidelines established by ADA for walking surfaces and ramps

### environmental attributes

- Vinyl alternative product
- Made in the USA
- Certified under FloorScore – an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3

### performance attributes

- **Superior rubber formulation**
  - Superior indentation resistance, color retention and slip-resistance
  - Superior scratch-resistance due to low clay and high pigment content
  - Quieter underfoot
- **Built-in long lasting migrating wax**
  - No wax required, low maintenance option
  - Self-waxing feature for superior appearance retention
  - Lower life cycle costs
- **Superior profile design**
  - Profile design allows for enhanced cleanability
- **Superior warranties**
  - Limited 10-Year Wear Warranty
  - Limited 10-Year Commercial Warranty

### colorscape™ tile profiles



round

thickness – 1/8"

size – 18 1/8" x 18 1/8" (460mm x 460mm)

face – .025" raised profile



square

thickness – 1/8"

size – 18 1/8" x 18 1/8" (460mm x 460mm)

face – .025" raised profile



sculptured

thickness – 1/8"

size – 18 1/8" x 18 1/8" (460mm x 460mm)

face – sculptured profile

### color choices



924 toasted sesame



910 glacier



913 mineral gray



925 prairie sand



918 flax



902 deep suede



919 bronze



923 frosted jade



905 pewter



909 taupestone



911 sable



907 stone gray



908 iron



922 silver pine



916 niagara blue



917 sierra



920 horizon



915 forest



914 wineberry



921 toffee



903 dark chocolate



904 bark



912 navy



906 laguna blue



901 night black

Custom colors available.  
Contact your Mannington representative.

# colorfields™

*Unparalleled performance, exceptional design flexibility.*

Features beautiful colorations ranging from soft neutrals to expressive, vibrant brights. Superior durability and low maintenance make ColorFields the ideal choice for healthcare and education.



Colorfields smooth surface rubber sheet and tile flooring delivers unparalleled performance coupled with exceptional design flexibility and aesthetics.

ColorFields is available in a smooth profile.

### product attributes

- Thermoset rubber tile
- 21 colors
- Available in 4' x 49.2' sheet (full rolls only), 24" x 24" tile (500 sq ft minimum) or 23 3/4" x 23 3/4" tile (5,600 sq ft minimum)
- ASTM F-1859 sheet - Type 1, Homogeneous Rubber Sheet  
ASTM F-1344 Tile - Class I, Type A, Grade B
- Meets or exceeds ADA Guidelines for walking surfaces and ramps


### environmental attributes

- Vinyl alternative product
- Contains 6% rapidly renewable resource content by total product weight
- Certified under FloorScore – an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3

### performance attributes

- **Superior rubber formulation**
  - Superior indentation resistance, color retention and slip-resistance
  - Superior scratch-resistance due to low clay and high pigment content
  - Quieter underfoot
  - No wax required, low maintenance option
  - Self-waxing feature for superior appearance retention
  - Lower life cycle costs
- **Superior warranties**
  - Limited 5-Year Wear Warranty
  - Limited 10-Year Commercial Warranty


### color choices

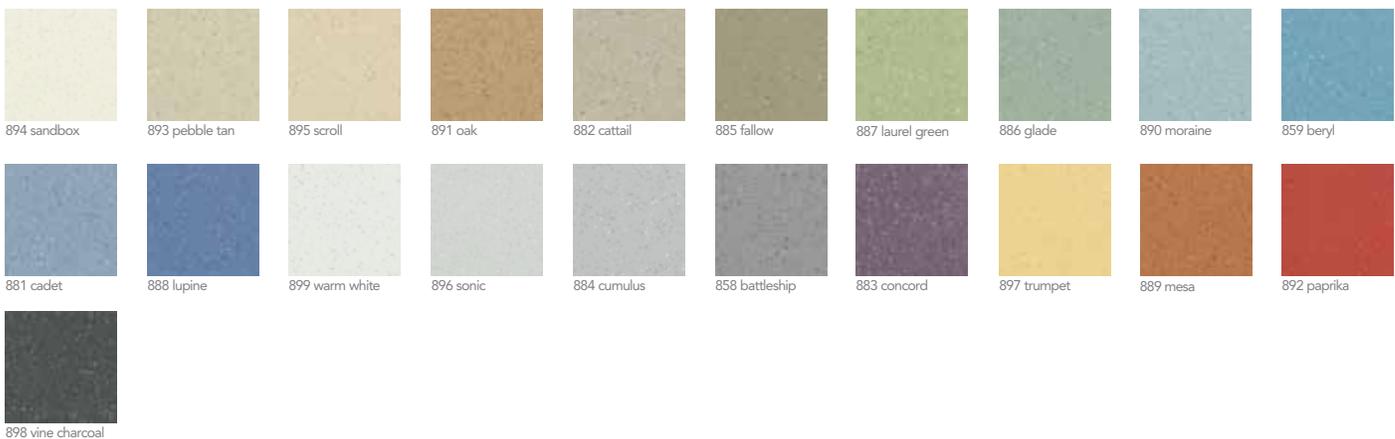

# reset™

*Uniting sustainability and performance.*

Created from recycled rubber tires, Reset is the ideal sports choice for high impact daycares, fitness facilities and gyms.

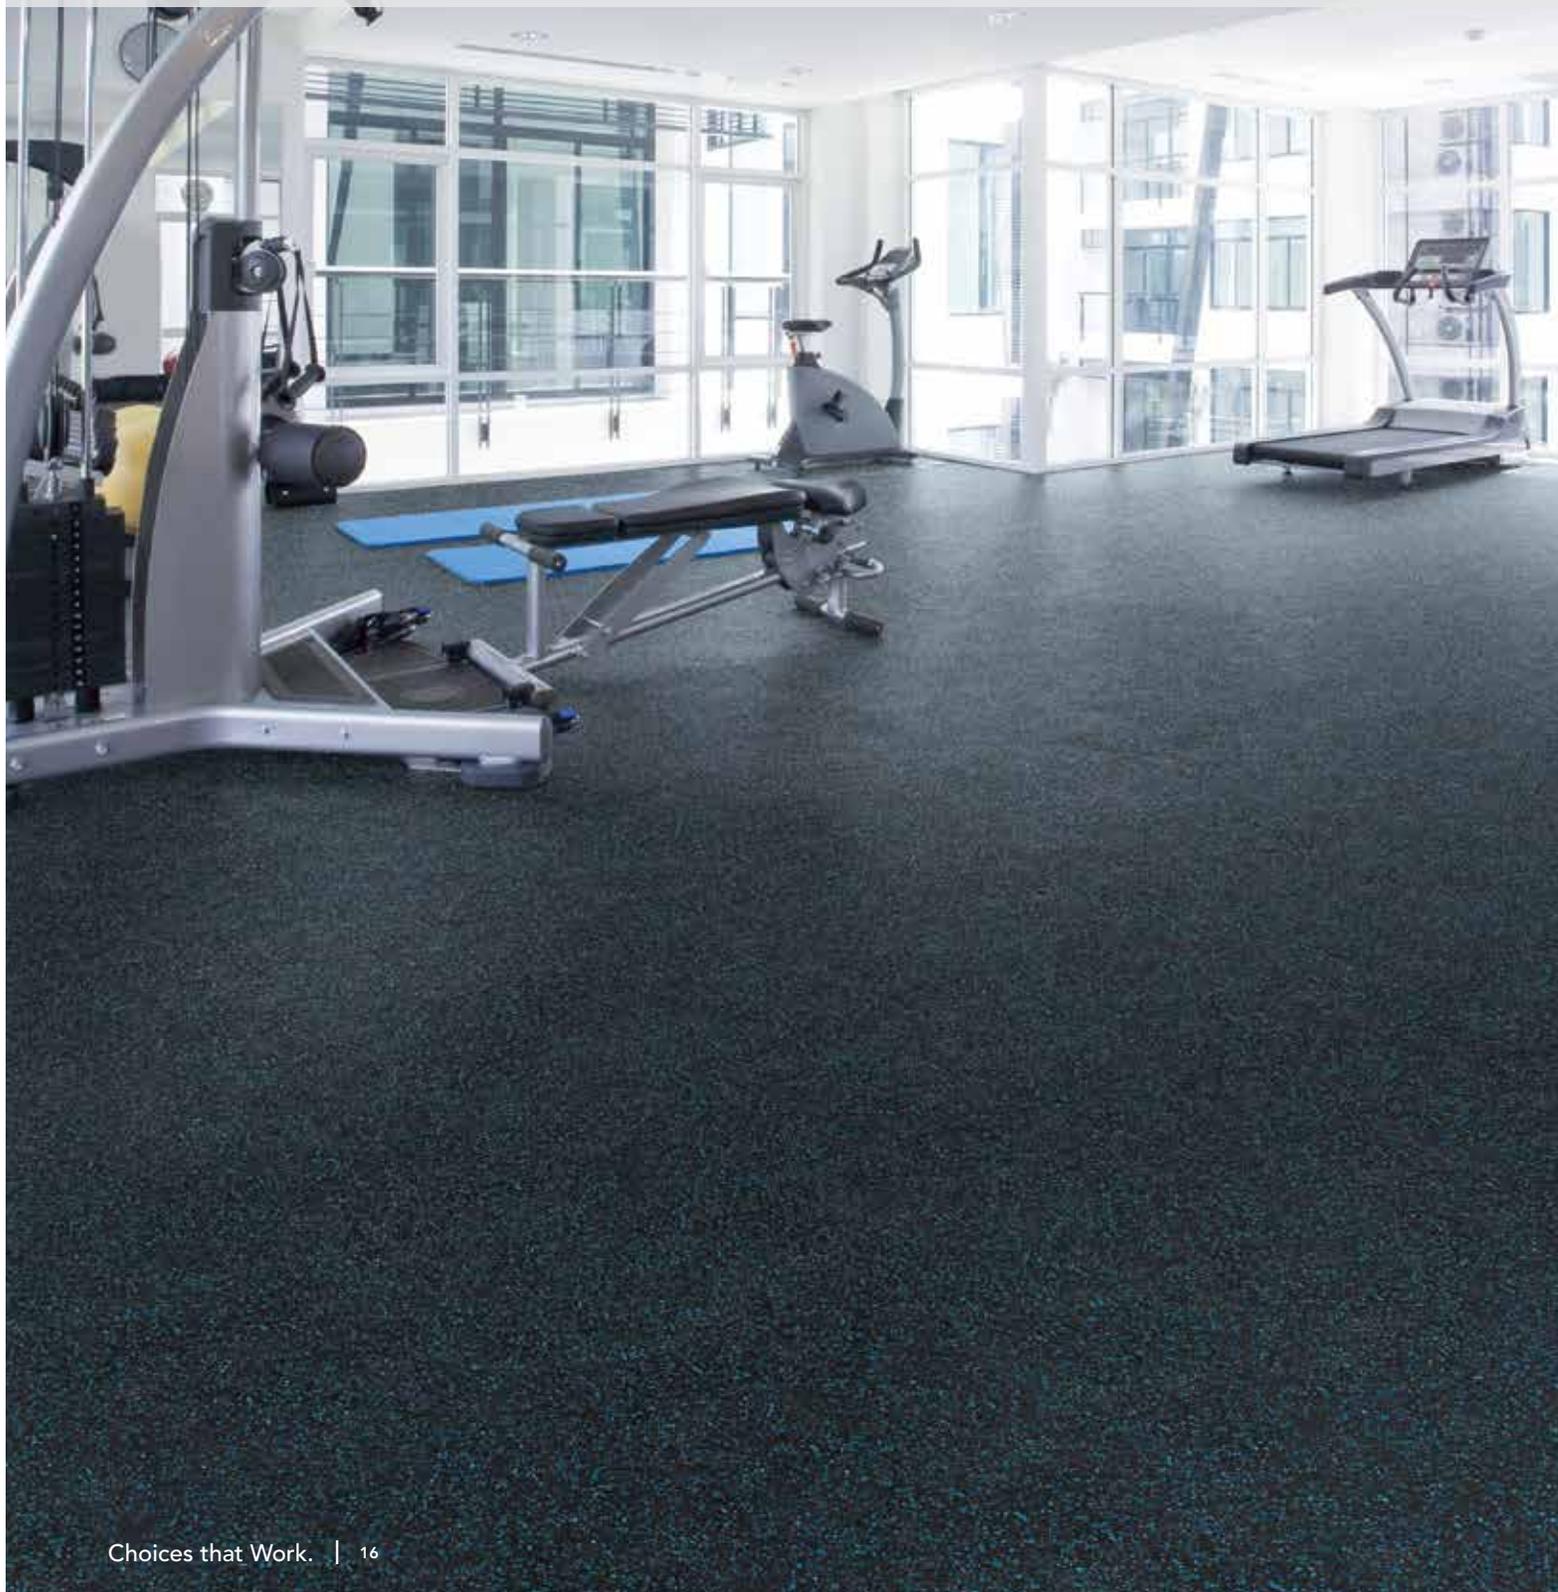

reset™

recycled rubber flooring

Constructed from post-consumer recycled rubber tires, it's easy to install and maintain. Reset's high performance, slip-resistant surface provides enhanced stability and traction, as well as impact resistance and quietness underfoot.

### product attributes

- Recycled Rubber
- 9 colors
- Available in 18" x 18" tiles, 4' x 50' sheet and 24" x 24" interlocking tile
- ASTM D2047 Coefficient of Friction >0.8

### environmental attributes

- Reset in the color Black Tones contains a minimum of 91% post-consumer recycled content by total product weight. All other colors of Reset contain a minimum of 72% post-consumer recycled content and a minimum of 4% pre-consumer recycled content by total product weight. May contribute to LEED MR Credit 4.1 and 4.2.
- Vinyl alternative product
- Made in the USA
- Certified under FloorScore – an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3

### performance attributes

- Slip resistant surface provides enhanced stability and traction
- Impact resistance and quietness underfoot
- Limited 5 Year Commercial Warranty


### color choices



826 Orange Tones



820 Blue Tones



822 Yellow Tones




823 Primary Tones



828 Black Tones



827 Gray Tones



824 Beige Tones



825 Green Tones



821 Red Tones

Custom colors available.  
Contact your Mannington representative.



Reference page 57 for color choices.  
Reference page 51 for technical information.

# enforcer™

*The ultimate option for sports tile with style, design and long lasting performance.*

Engineered to resist wear and tear of skate and spike applications, Enforcer is guaranteed to endure the toughest recreational environments.

Engineered to resist the wear and tear of skate and spike applications, Enforcer is guaranteed to endure the toughest recreational environments.

### product attributes

- Thermoset rubber
- 6 ColorScape (solid) and 6 ColorSpec (fleck) colors
- Available in 36" x 36" tiles
- 1/4" nominal thickness sculptured profile, square edge
- Meets guidelines established by ADA for walking surfaces and ramps

### environmental attributes

- Vinyl alternative product
- Made in the USA
- Certified under FloorScore – an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3

### performance attributes

- **Superior rubber formulation**
  - Superior indentation resistance, color retention and slip-resistance
  - Superior scratch-resistance due to low clay and high pigment content
  - Quieter underfoot
- **Built-in long lasting migrating wax**
  - No wax required, low maintenance option
  - Self-waxing feature for superior appearance retention
  - Lower life cycle costs
- **Superior profile design**
  - Profile design allows for enhanced cleanability
- **Superior warranties**
  - Limited 10-Year Wear Warranty
  - Limited 10-Year Commercial Warranty



#### sculptured / square edge

1/4 " nominal  
size – 36" x 36"  
face – sculptured profile

### color choices



901 night black



908 iron



912 navy



914 wineberry



915 forest



918 flax



978 windsor blue




977 mauvestone



976 sharkskin



972 wheat



971 storm




983 chili pepper

Custom colors available.  
Contact your Mannington representative.

# colorspec™ stair treads

Blend style and performance with our ColorSpec non-directional design stair treads.

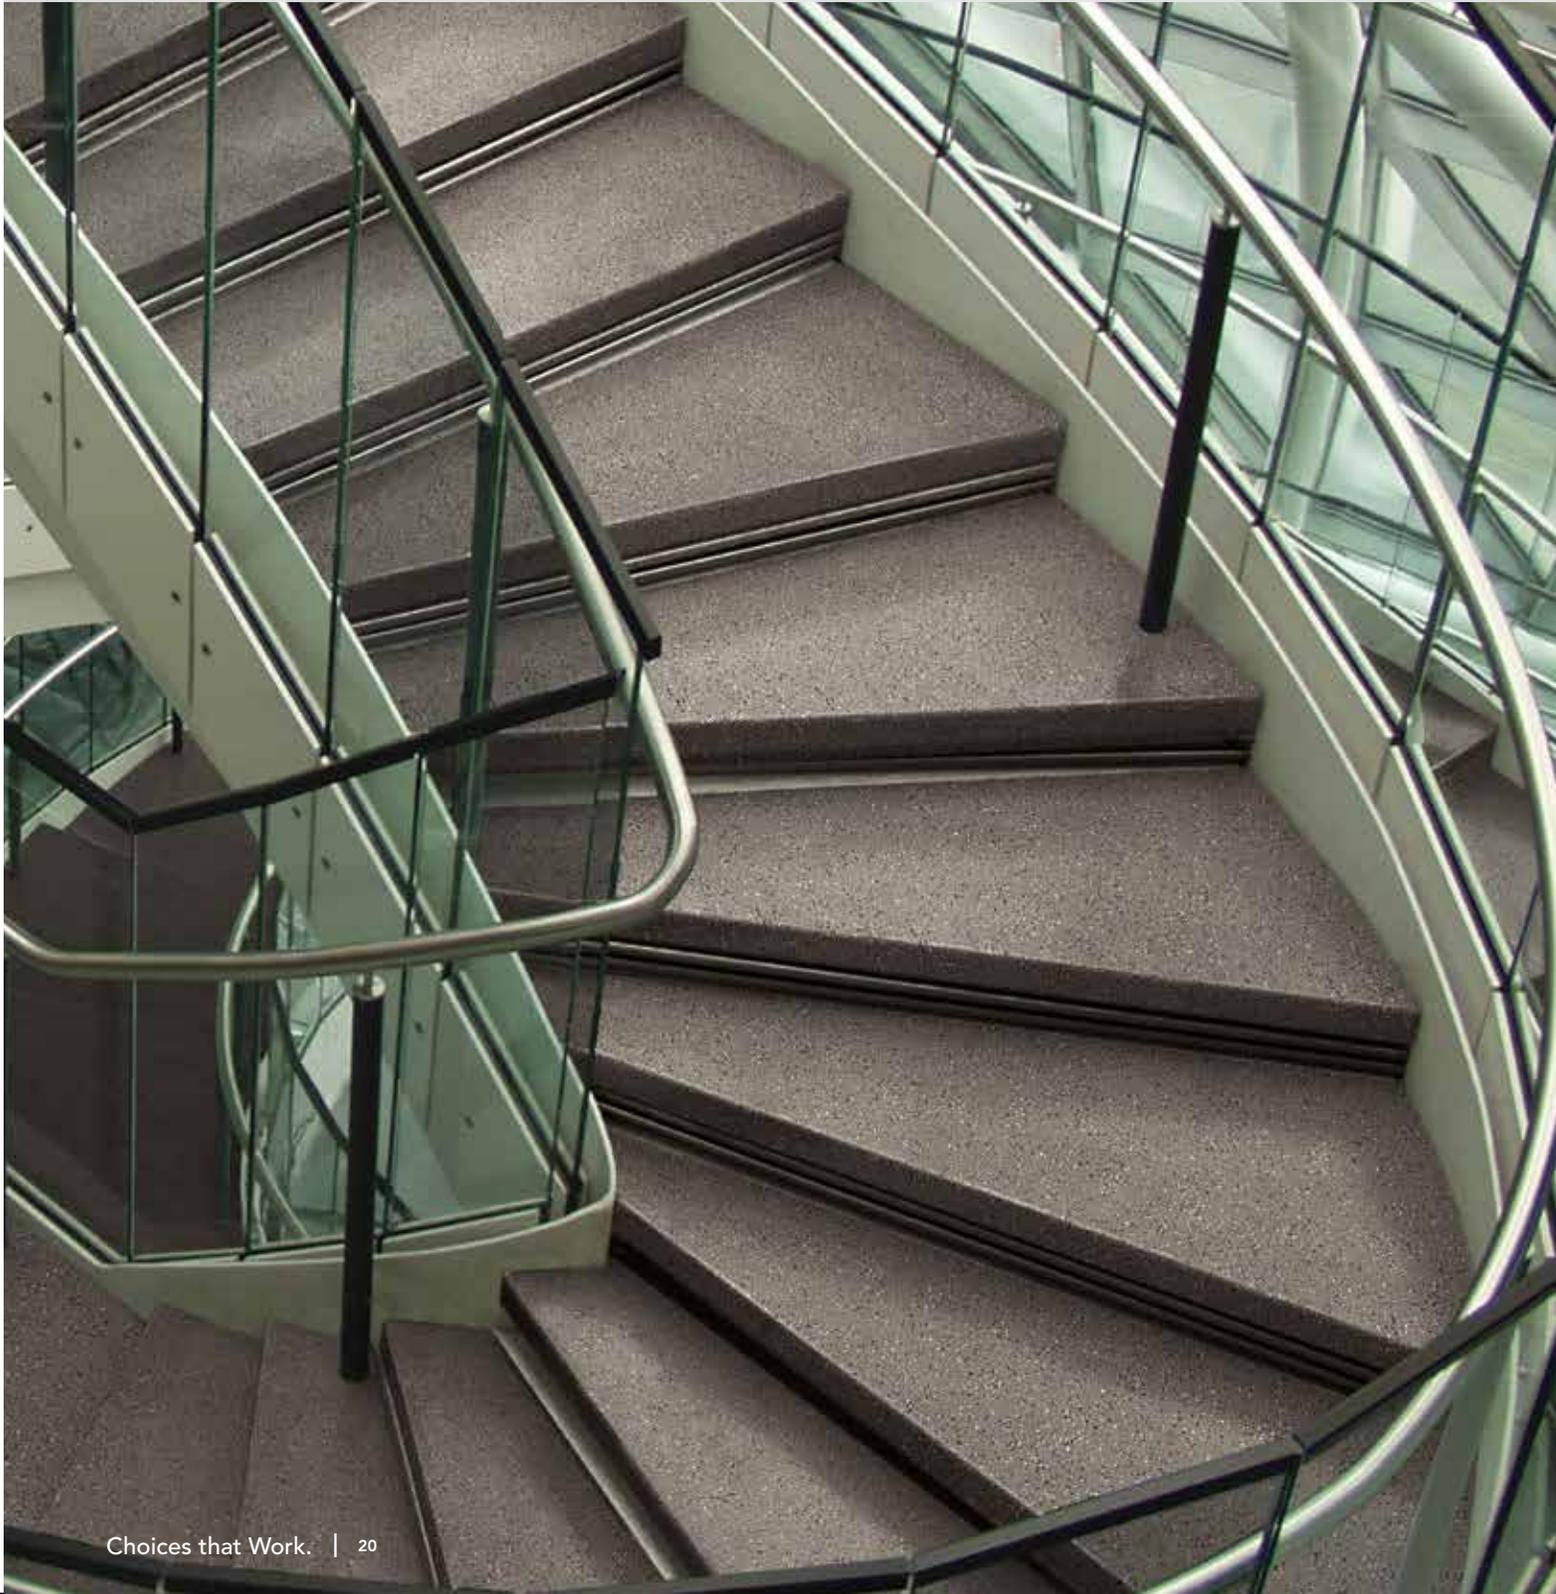

# colorspec™ stair treads

rubber stair treads

The superior rubber formulation offers a slip-resistant surface, while preserving design from scuffing, gouging and abrasions. A vinyl alternative product, our rubber's natural luster requires no waxing or stripping.

Choose from simple square or sculptured texture profiles.

## product attributes

- Thermoset vulcanized rubber – Type TS
- 22 colors
- Available in 4', 5' and 6' lengths
- Square & sculptured profiles
- Square nosing
- Meets guidelines established by ADA for walking surfaces and ramps

## environmental attributes


- Vinyl alternative product
- Made in USA
- Certified under FloorScore – an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3

## performance attributes

- **Superior rubber formulation**
  - Superior indentation resistance, color retention and slip-resistance
  - Superior scratch-resistance due to low clay and high pigment content
  - Quieter underfoot
- **Built-in long lasting migrating wax**
  - No wax required, low maintenance option
  - Self-waxing feature for superior appearance retention
  - Lower life cycle costs
- **Superior profile design**
  - Profile design allows for enhanced cleanliness
- **Superior warranties**
  - Limited 5-Year Stair Nosing Warranty (no epoxy compound required)
  - Limited 10-Year Wear Warranty
  - Limited 10-Year Commercial Warranty


## colorspec™ stair tread profiles

square profile, square nose



thickness – 1/8"  
profile – square  
lengths – 4', 5', 6'

square profile, square nose visually impaired

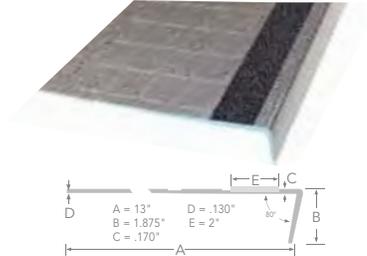

thickness – 1/8"  
profile – square  
lengths – 4', 5', 6'



All Visually Impaired stair treads meet the California Disabled Access regulations Title 24 for the visually impaired when used with contrasting strip color.

Note: Smooth rubber contrasting strips available upon request.


## ConnectStep™

sculptured profile



Our ConnectStep tread-and-riser solution is unique to Mannington Commercial. Fast and simple to install, ConnectStep offers a seamless flow that looks great and is easier to clean. Available in sculptured profile and visually impaired options.

ConnectStep automatically adjusts for step depths of between 9½" and 13". This also allows for adjustments to varying riser heights. Available in both square nose and visually impaired selections.



riser - Type TS

thickness – 1/8"  
lengths – 4', 5', 6'  
height – 7" coved

stringer - Type TS

thickness – 1/8"  
lengths – 12" x 36" slabs

# colorscape™ stair treads

Turning stairs into a design feature, where the beautiful colors installed are beautiful colors that last.



# colorscape™ stair treads

rubber stair treads

Our superior rubber formulation offers a slip-resistant surface, while preserving your design from scuffing, gouging and abrasions. A vinyl alternative product, our rubber's natural luster requires no waxing or stripping and coordinates with our rubber tile.

Select from classic round, simple square or sculptured texture profiles.

## product attributes

- Thermoset vulcanized rubber – Type TS
- 25 Sync™ colors
- Available in 4', 5' and 6' lengths
- Round, square & sculptured profiles
- Square nosing
- Meets guidelines established by ADA for walking surfaces and ramps


## environmental attributes

- Vinyl alternative product
- Made in USA
- Certified under FloorScore – an independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED IEQ Credit 4.3

## performance attributes

- **Superior rubber formulation**
  - Superior indentation resistance, color retention and slip-resistance
  - Superior scratch-resistance due to low clay and high pigment content
  - Quieter underfoot
- **Built-in long lasting migrating wax**
  - No wax required, low maintenance option
  - Self-waxing feature for superior appearance retention
  - Lower life cycle costs
- **Superior profile design**
  - Profile design allows for enhanced cleanability
- **Superior warranties**
  - Limited 5-Year Stair Nosing Warranty (no epoxy compound required)
  - Limited 10-Year Wear Warranty
  - Limited 10-Year Commercial Warranty


## colorscape™ stair tread profiles

<p><b>round profile square nose</b></p>  <p>A = 12.25" C = .188" B = 1.813" D = .115"</p> <p>thickness – 1/8" profile – round lengths – 4', 5', 6'</p>	<p><b>square profile square nose</b></p>  <p>A = 13" C = .170" B = 1.875" D = .130"</p> <p>thickness – 1/8" profile – square lengths – 4', 5', 6'</p>	<p><b>round profile, square nose visually impaired</b></p>  <p>A = 12.25" D = .115" B = 1.813" E = 2" C = .188"</p> <p>thickness – 1/8" profile – round lengths – 4', 5', 6'</p>	<p><b>square profile, square nose visually impaired</b></p>  <p>A = 13" D = .130" B = 1.875" E = 2" C = .170"</p> <p>thickness – 1/8" profile – square lengths – 4', 5', 6'</p>	
--	--	---	---	---

All Visually Impaired stair treads meet the California Disabled Access regulations Title 24 for the visually impaired when used with contrasting strip color.

Note: Smooth rubber contrasting strips available upon request.

## ConnectStep

<p><b>round profile</b></p> 	<p><b>sculptured profile</b></p> 
 <p>round: B=1.813" C=.188" D=.158" F=.100" G=19.50"</p> <p>sculptured: B=1.88" C=.188" D=.188" F=.080" G=20"</p>	

Our ConnectStep tread-and-riser solution is unique to Mannington Commercial. Fast and simple to install, ConnectStep offers a seamless flow that looks great and is easier to clean. Available in round and sculptured profile.

ConnectStep automatically adjusts for step depths of between 9½" and 13". This also allows for adjustments to varying riser heights. Available in both square nose and visually impaired selections.


Available in Sync™ coordinated color palette.



Reference page 57 for color choices.  
Reference page 51 for technical information.

# linear stair treads

Specifying for light wear or heavy commercial traffic? Move forward with the improved traction and visual appeal of our high-performing linear stair treads.

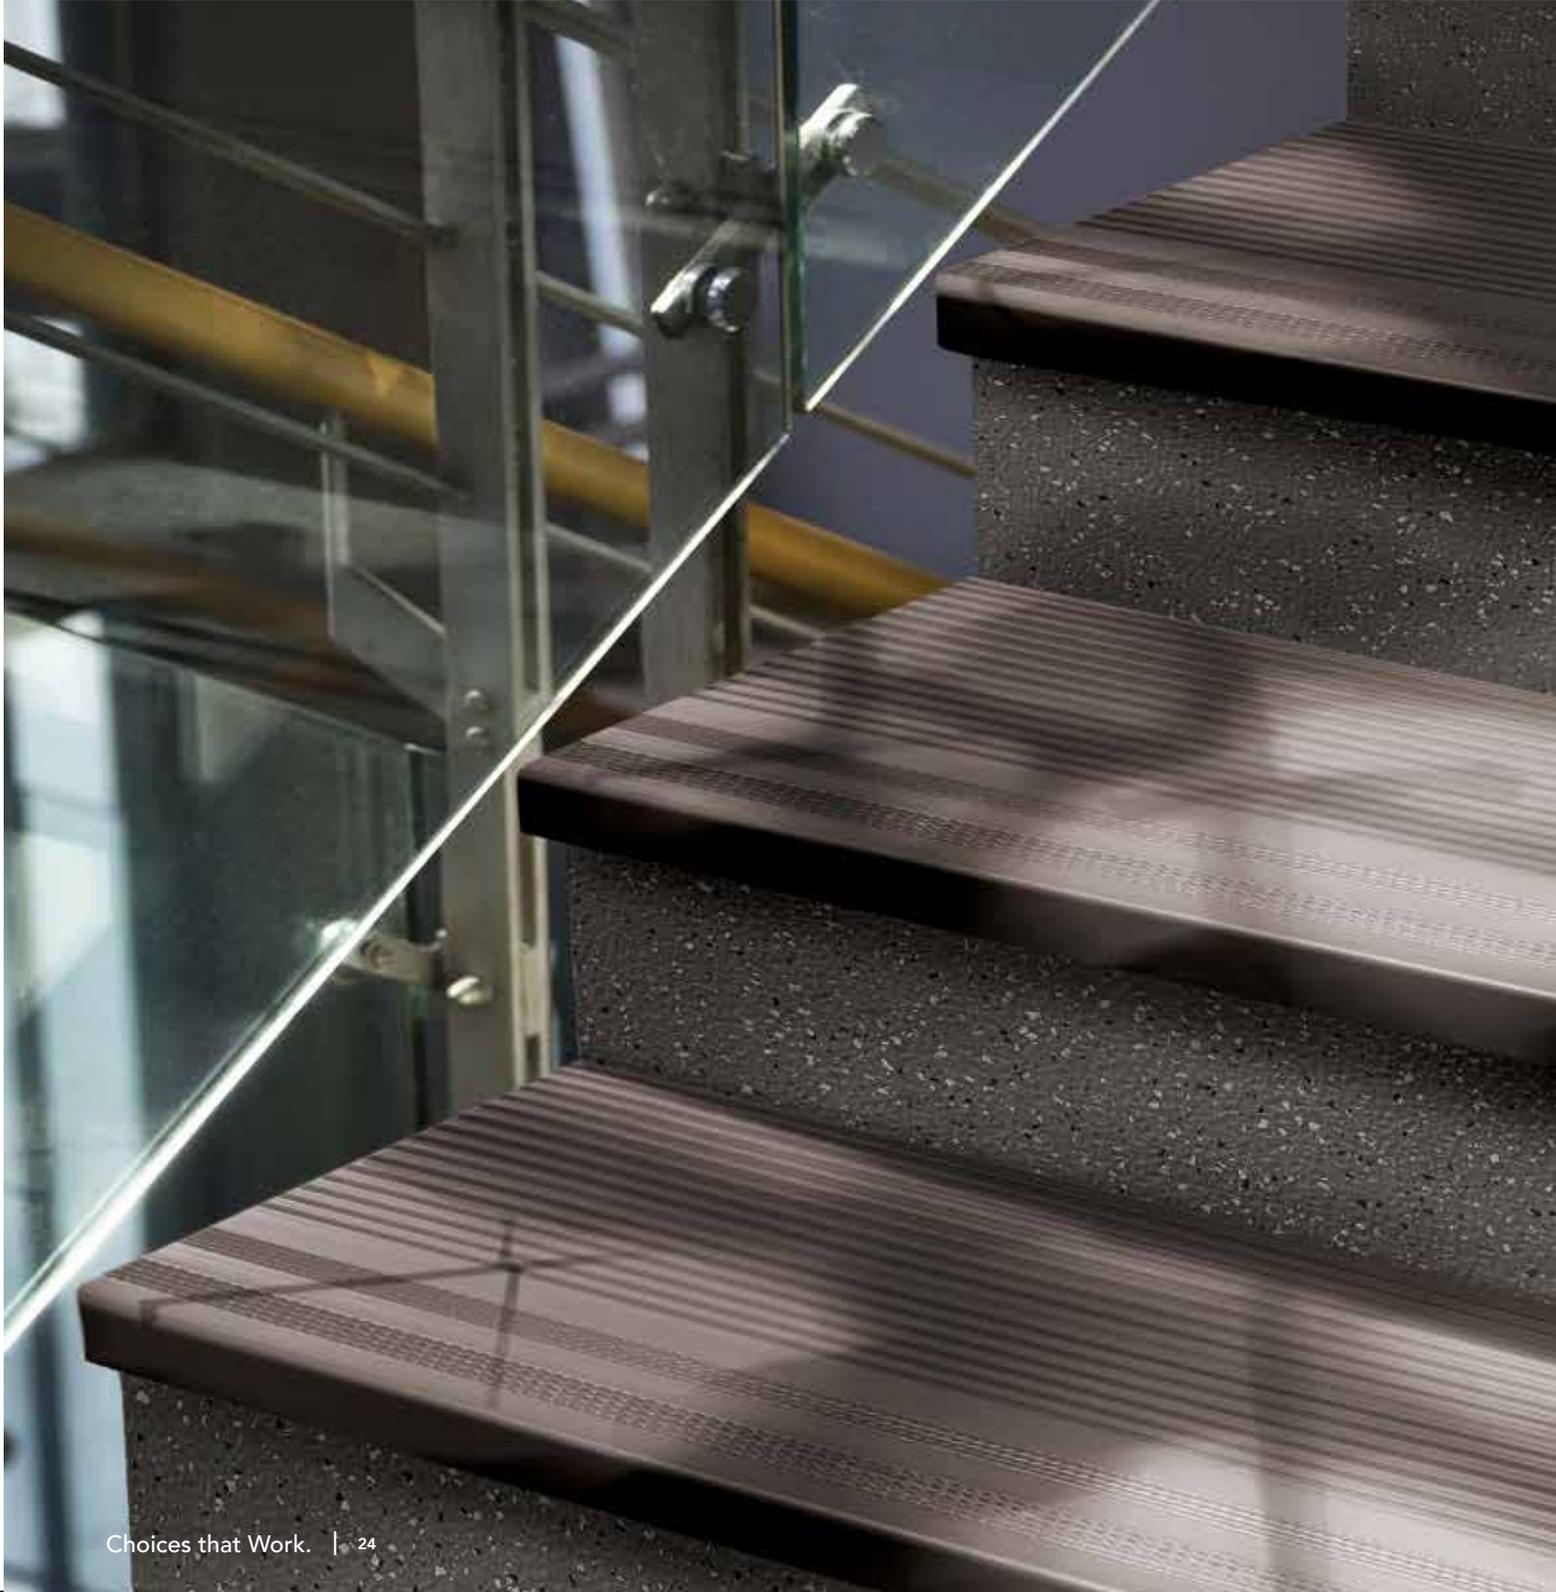

# linear stair treads

## rubber and vinyl stair treads

A range of choices in co-extruded performance rubber or vinyl. In more colors to complement your design.

The unique grooved surface not only offers visual appeal but, improved traction.



### product attributes

- **Commercial 250**
  - Co-extruded thermoplastic rubber – Type TP
- **Commercial 250, 210, 150**
  - Co-extruded thermoplastic vinyl – Type TV
- **25 Sync™ colors**
- **Available in 3', 3½', 4', 5', 6', 8' and 12' lengths**
- **Meets guidelines established by ADA for walking surfaces and ramps**
- **Made in USA**
- **Limited 5-Year Commercial Warranty (epoxy compound required for proper installation)**

### linear stair tread profiles

**commercial 250 - heavy traffic**  
(rubber Type TP and vinyl Type TV)  
**square nose**



round nose available upon request



- Design: Six-Grip Strip
- Round nose available on request
- Epoxy nose filler required

**commercial 210 - normal traffic**  
(vinyl Type TV only)  
**square nose**


round nose available upon request



- Design: Pyramidal Gripper
- Square Nose only
- Epoxy nose filler required



**commercial 150 - light traffic**  
(vinyl Type TV only)  
**square nose**

round nose available upon request



- Design: Full Depth Corrugation
- Round nose available on request
- Epoxy nose filler required

**visually impaired safety tread**  
(rubber Type TP)

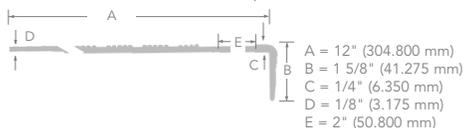

- Design: 2" (50.800 mm) Abrasive Strip
- Epoxy nose filler required



All Visually Impaired stair treads meet the California Disabled Access regulations Title 24 for the visually impaired when used with contrasting strip color.



**riser – rubber Type TP or vinyl Type TV**

thickness – .085"  
lengths – 50' coil rolls  
height – 7" coved

**stringer – rubber Type TP or vinyl Type TV**

thickness – .085"  
lengths – 50' coil rolls  
height – 10"



Reference page 57 for color choices.  
Reference page 51 for technical information.

# linear stair nosing

Outstanding performance, designed to bear the brunt of foot traffic. A great look that lasts.



# linear stair nosing

## rubber nosings

Extending the life of the stair floor covering for years to come.

### product attributes

- Thermoplastic rubber – Type TP
- 25 Sync™ colors
- Meets guidelines established by ADA for walking surfaces and ramps
  - section 4.5.2 (change in level)
  - section 4.5.3 (carpet and edge trim compliance)
- Made in USA
- Limited 1-Year Commercial Warranty (epoxy compound required for proper installation)

product	profile	description	packaging
510 Top-Set Squared		Covers leading edge of step. May be used over vinyl and sheet goods.	20-12' secs. Per carton (240 feet)
511 Top-Set Rounded		Covers leading edge of step. May be used over resilient tile and sheet goods.	20-12' secs. Per carton (240 feet)
557 Visual Safety		Contrasting insert for Visually Impaired. Accepts 1/4" (6.350 mm) with lip, 3/8" (9.525mm) without lip	6-12' secs. Per carton (72 feet)
560 Double Butt Carpet Stair		Nosing for square, nose step. Double butt edge; smooth surface accommodates step and riser. For 1/4" carpet installations.	10-12' secs. Per carton (120 feet)
565 Double Undercut Carpet Stair		For 1/4" and 5/16" carpet. Accommodates step and riser; with ribbed surface.	10-12' secs. Per carton (120 feet)
570 Superior Carpet Stair		Friction-Grip nosing for use when only step is covered. Undercut for 1/4" and 5/16" carpet.	10-12' secs. Per carton (120 feet)
575 Overlap Stair		Nosing with deep grooves and overlap lip. Accepts material to 1/8".	10-12' secs. Per carton (120 feet)
580 Commercial Step		Square step nosing for 1/8" material. Ribbed surface.	10-12' secs. Per carton (120 feet)



Reference page 57 for color choices.  
Reference page 51 for technical information.



# sculptured wall base

## edge effects

Add rich detail in profiles and colors that bring the classic effect of milled trim wood – with 21st century ease of installation and engineered performance. At the edges of design, create Edge Effects.

High quality rubber wall base designed for durability and easy, seemingly seamless installation.

Resisting the scuffs and dents – and high costs of installation and maintenance – that are common with painted wood.

Mannington wall base


**EDGE**

# edge effects<sup>®</sup>

It's time to reclaim the edges of design - those spaces between the floor and walls that put the finishing touches on any interior.

No longer an afterthought – make wall base an architectural accent. With Edge Effects<sup>®</sup> sculptured rubber wall base, you can create the elegant effect of a milled wood base.

SCULPTURED WALL BASE

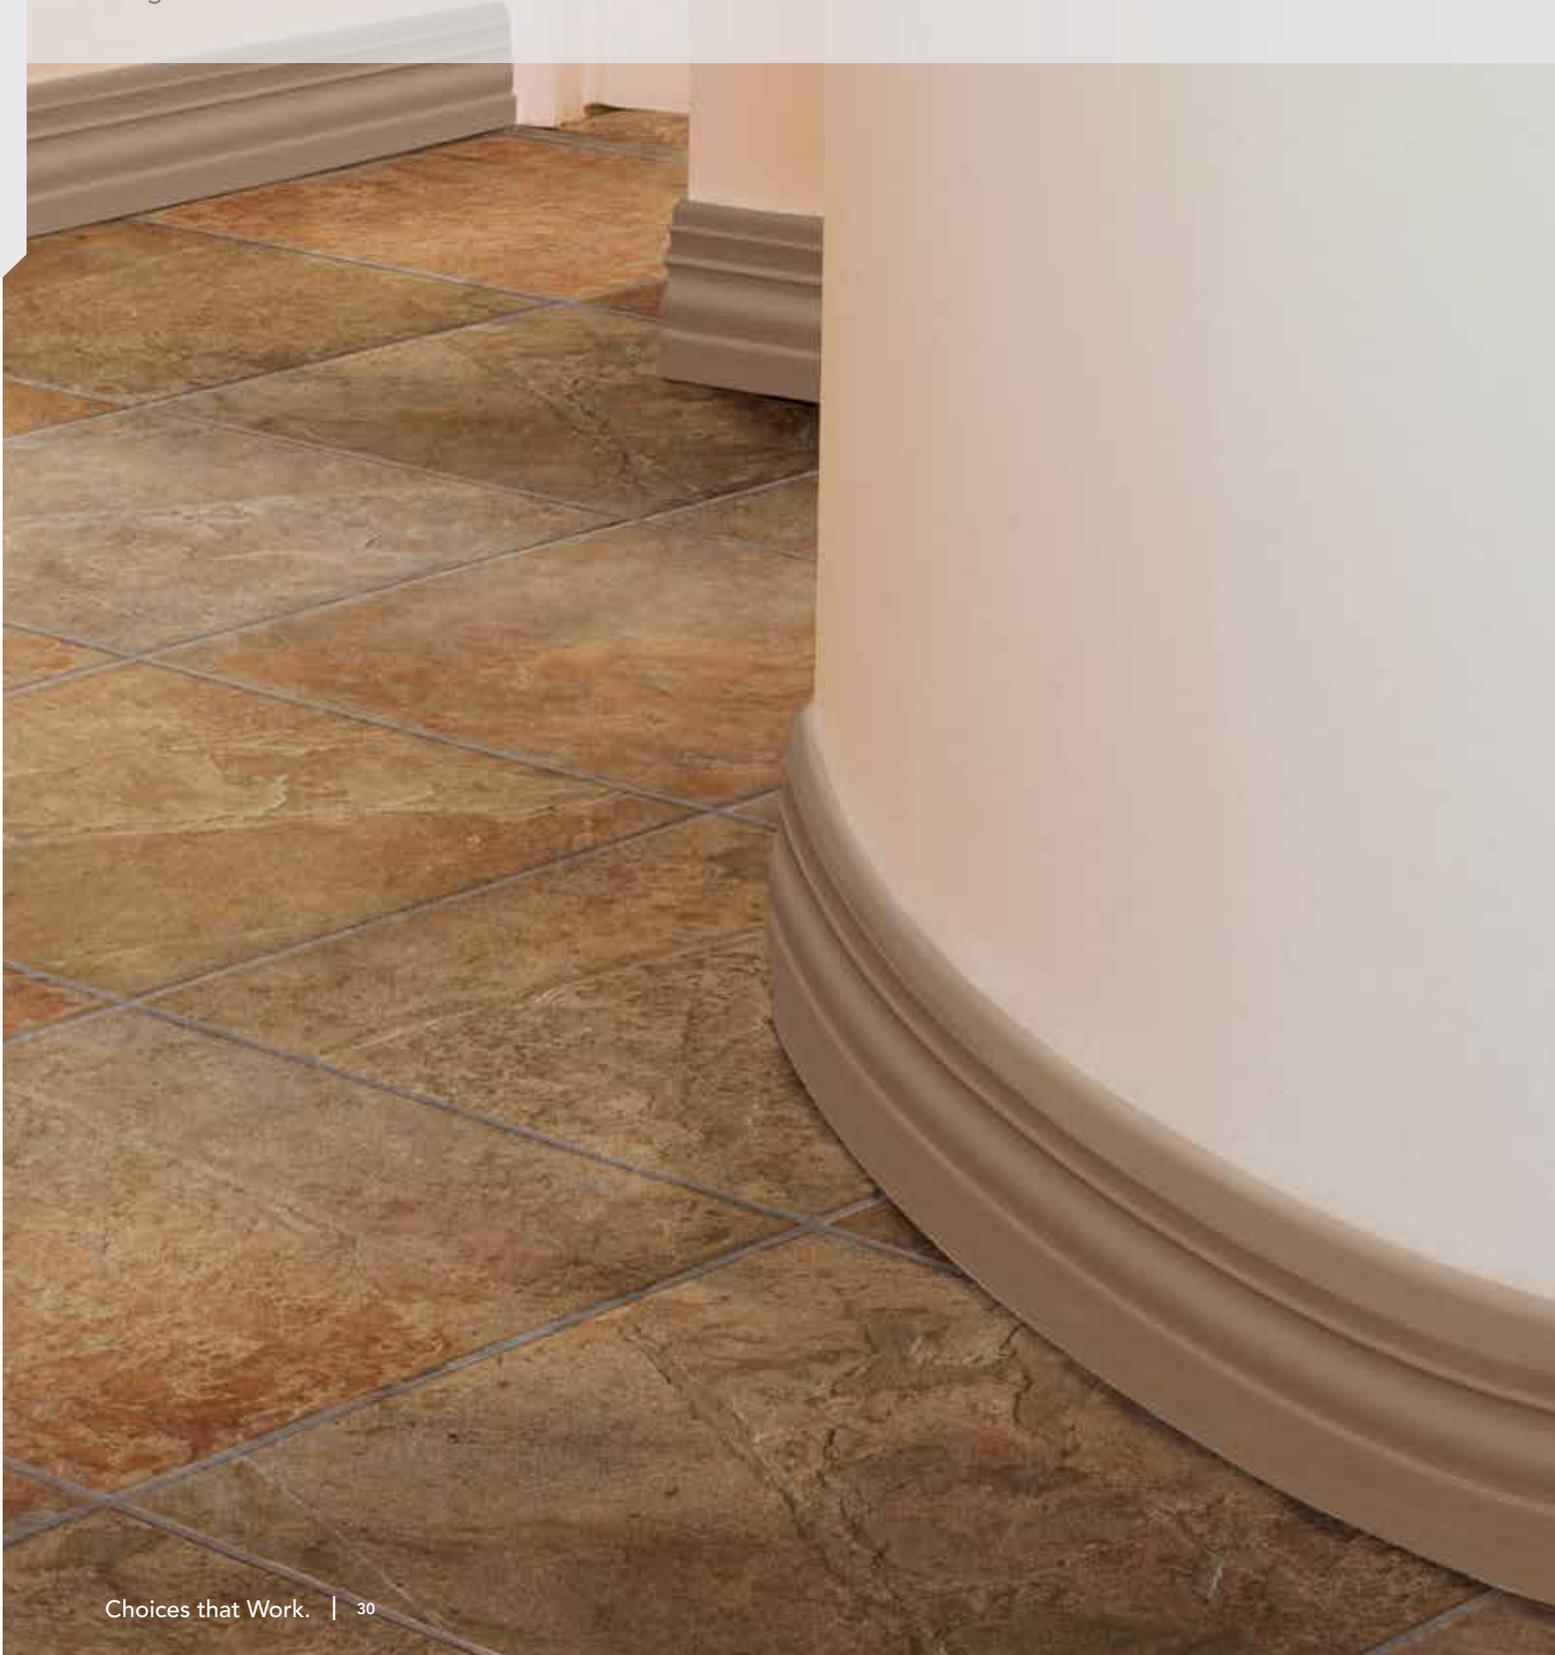

# edge effects®

rubber wall base


Create the high profile, elegant effect of milled wood wall base – without the expensive installation, indentations, scuffs and abrasions.

Edge Effects sculptured wall base offers rich architectural detail in high-quality rubber, engineered for flexible application to walls, corners and columns.

## product attributes

- Co-extruded thermoplastic rubber –Type TP
- Contains 10% pre-consumer recycled content
- Smooth matte finish
- Curved surface flexibility
- 25 Sync™ colors in addition to 5 neutrals
- Available in 15 profiles including chair rail and quarter-round for design flexibility
- Pre-mitered inside / outside corners
- Made in USA
- Limited 5 Year Commercial Warranty


## maximize value

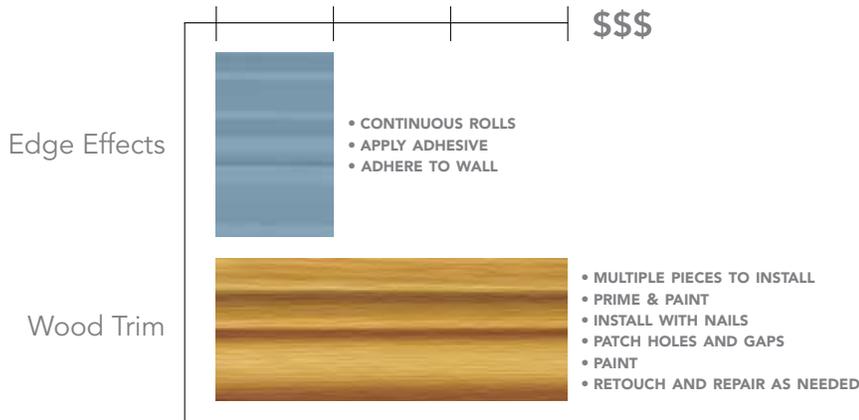

Edge Effects is more economical than traditional wood trim. Available in continuous rolls saving installation time and money. And once installed, it has lower maintenance costs than natural wood bases. Over time, Edge Effects offers the best lifecycle value.

- Requires no nailing, priming or painting
- Dent and scratch resistant
- No heavy cleanup required


## pre-mitered inside and outside corners



Pre-mitered inside and outside corners are available to match various wall base heights.

Our pre-mitered corners eliminates steps and time required to finish a job:

- No priming
- No painting
- No knots
- No caulking
- Uniformed finished appearance
- No miter saw required
- Corner return length ranges from 6" to 9" dependent upon profile



# edge effects®

Choices in color, design and texture engineered for superior performance.

Achieve a natural look with Edge Effects, our flexible, rubber wall base that simulates painted, milled wood.



**cache 4 1/4"**  
 thickness – 3/8" (9.52 mm)  
 height – 4 1/4" (10.8 cm)  
 lengths – 50' (15.34 m) coiled per carton




**cache 3"**  
 thickness – 3/8" (9.52 mm)  
 height – 3" (7.62 cm)  
 lengths – 50' (15.24 m) coiled per carton



**illusion**  
 thickness – 3/8" (9.52 mm)  
 height – 3 1/4" (8.26 cm)  
 lengths – 36' (11 m) coiled per carton



**marquee**  
 thickness – 3/8" (9.52 mm)  
 height – 4 1/4" (10.8 cm)  
 lengths – 50' (15.24 m) coiled per carton

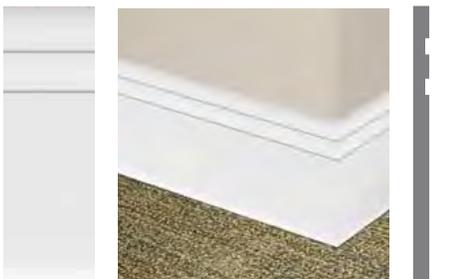

**double etched**  
 thickness – 1/4" (6.35 mm)  
 height – 4 1/4" (10.8 cm)  
 lengths – 50' (15.34 m) coiled per carton



**sophisticate**  
 thickness – 3/8" (9.52 mm)  
 height – 4 1/4" (10.8 cm)  
 lengths – 50' (15.34 m) coiled per carton



**regal**  
 thickness – 3/8" (9.52 mm)  
 height – 5 1/4" (13.3 cm)  
 lengths – 25' (11 m) coiled per carton

Note: Pre-mitered corners are available for each profile. Return size is profile dependent.



**flair**  
thickness – 5/16" (7.94 mm)  
height – 3" (7.6 cm)  
lengths – 50' (15.34 m) coiled per carton



**simplicity**  
thickness – 5/16" (7.94 mm)  
height – 4 1/2" (11.4 cm)  
lengths – 36' (11 m) coiled per carton



**iconic**  
thickness – 3/8" (4.76 mm)  
height – 4 1/4" (10.8 cm)  
lengths – 50' (15.34 m) coiled per carton



**cetera**  
thickness – 5/16" (7.94 mm)  
height – 4 1/2" (10.8 cm)  
lengths – 36' (11 m) coiled per carton



**etched**  
thickness – 1/4" (6.35 mm)  
height – 4 1/4" (10.8 cm)  
lengths – 50' (15.34 m) coiled per carton



**elegance**  
thickness – 3/16" (4.76 mm)  
height – 6" (15.2 cm)  
lengths – 36' (11 m) coiled per carton

## chair rail



**effectual**  
thickness – 1/4" (6.35 mm)  
height – 4" (10.2 cm)  
lengths – 12'



**corner guard**  
thickness – 1/4" (6.35 mm)  
height – 4" (10.2 cm)  
lengths – 12'

## quarter-round



**quarter round**  
thickness – 1/2" (12.7 mm)  
height – 1/2" (1.3 cm)  
lengths – 12'  
includes self-stick adhesive



# wall base

**optimum edge**  
**premium edge**  
**mannington edge**

Wall base that adds wow factor, or a nuanced touch, to the edges of a room. Designed with the right choices in color and proven performance to meet the needs of any commercial interiors project.

Flexible application and long-lasting, durability helps reduce maintenance and minimizes lifecycle costs.

Optimum Edge thermoset rubber (Type TS) is the highest quality rubber, offering superior dimensional stability.

Premium Edge thermoplastic rubber (Type TP) combines the best of flexibility with hard-wearing performance.

Mannington Edge (Type TV) vinyl, creates a beautiful and economical choice for heavy traffic applications.

# optimum edge™

Our premium vulcanized rubber wall base, Optimum Edge is engineered to look great from the day it's installed, for the life of the space.

WALL BASE



# optimum edge™


## rubber wall base

Easy to install, Optimum Edge has a unique top return that ensures a snug wall fit. It's molded construction prevents contraction or expansion during or after installation.

A vinyl alternative product, its molded, smooth satin luster, provides superior appearance and complements a wide variety of flooring and wall textures.

### product attributes

- **Thermoset vulcanized rubber – Type TS**
  - Superior dimensional stability
  - Minimizes gapping
  - Available in coved and toeless
  - 1/8" thickness
  - Easy to install - even in cold temperatures
  - Minimal acclimation required
- **69 colors including 25 Sync™ colors**
- **Available in 2½", 4", 6" heights**
- **Available in 4' lengths**
- **Optimum Edge 100 (Type TS) available in 4"x100' coved rolls (select colors only)**
- **Molded process**
  - Smooth satin luster
  - Clean surface finish
- **Unique top return**
  - Wraps around corners, columns and curved walls to ensure snug fit to wall
  - Ease of installation
- **Inside / outside corners (coved or toeless)**
  - No corners for Optimum Edge 100 TS rolls
- **Made in USA**
- **Limited 5 Year Commercial Warranty**

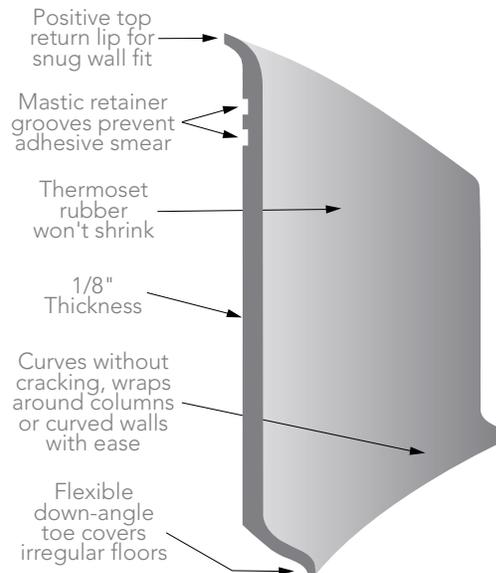

### molded inside and outside corners



inside



outside

Coved inside and outside corners are molded to match various wall base heights. Specify jobsite-molded or factory-molded corners.

### specifications for corner detail

toeless outside corner  
 thickness – 1/8"  
 height – 4", 6"  
 lengths – 3" return

cove inside corner  
 thickness – 1/8"  
 height – 2½", 4", 6"  
 lengths – 3" wings

cove outside corner  
 thickness – 1/8"  
 height – 2½", 4", 6"  
 lengths – 5' – 3" return

Note: Toeless inside corners are not available.

# premium edge™

Beautiful colors, with enduring flexibility.





# premium edge™

rubber wall base

Made of co-extruded thermoplastic rubber specifically formulated to stand up to scuffs and abrasions, Premium Edge is also flexible enough for easy installation around curves and corners.

## product attributes

- **Co-extruded thermoplastic rubber –Type TP**
  - Dimensionally stable
  - Available in coved and toeless
  - 1/8" thickness
  - Smooth matte finish
  - Superior color depth
  - Scuff and abrasion resistant
  - Enhanced flexibility for ease of installation around curves, columns and corners
  - Crack and white-out resistant
  - Will not oxidize or turn brittle
- **70 colors including 25 Sync™ colors**
- **Available in 2 ½", 4", 4 ½" and 6" heights**
- **4' lengths or 100' continuous roll**
- **Inside / outside corners (coved or toeless)**
- **Made in USA**
- **Limited 5 Year Commercial Warranty**

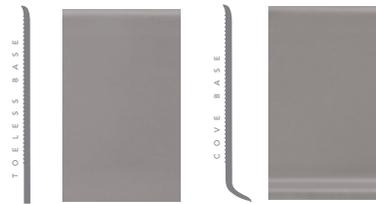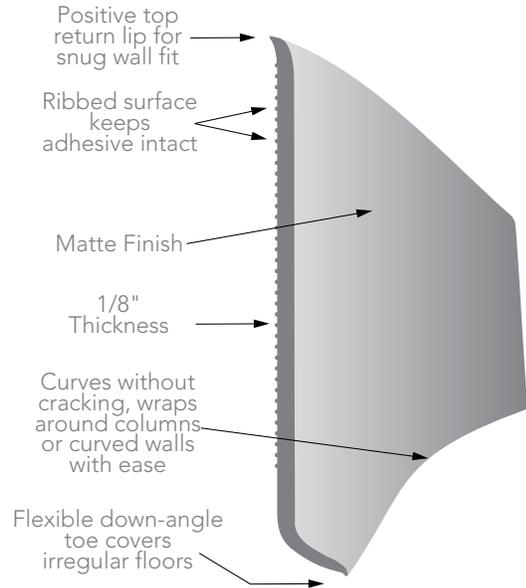

## pre-formed inside and outside corners



Coved inside and outside corners are available to match various wall base heights. Specify jobsite-molded or factory-molded corners.

### specifications for corner detail

- coved or toeless
- thickness – 1/8"
- height – 2 ½", 4", 4 ½", 6"
- length – 3" return

# mannington edge™

Made of durable vinyl, Mannington Edge is especially formulated to excel in high traffic environments.



# mannington edge™


vinyl wall base

A beautiful and economical choice for high maintenance areas.

The lovely colors and matte finish of this wall base easily conforms to irregularities of the wall and can be installed around curves and corners.

## product attributes

- Thermoplastic Vinyl – Type TV
- Abrasion resistant with matte finish
  - Ease of installation around curves and corners
  - Excellent for high traffic areas
- 1/8" or .080" thickness
- Available in coved and toeless
- 70 colors including 25 Sync™ colors
- 2½", 4", 4½" (1/8" only) and 6" heights
- 4' lengths or 100' roll
- Inside / outside corners (coved and toeless)
- Made in USA
- Limited 5 Year Commercial Warranty

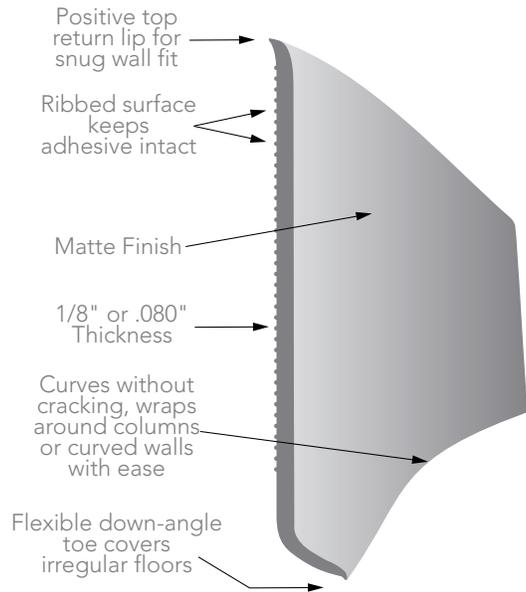

## pre-formed inside and outside corners




Coved inside and outside corners are available to match various wall base heights.

## specifications

- cove or toeless
- thickness – .080" or 1/8"
- height – 2½", 4", 4½" (1/8" only) 6"
- lengths – 3" return



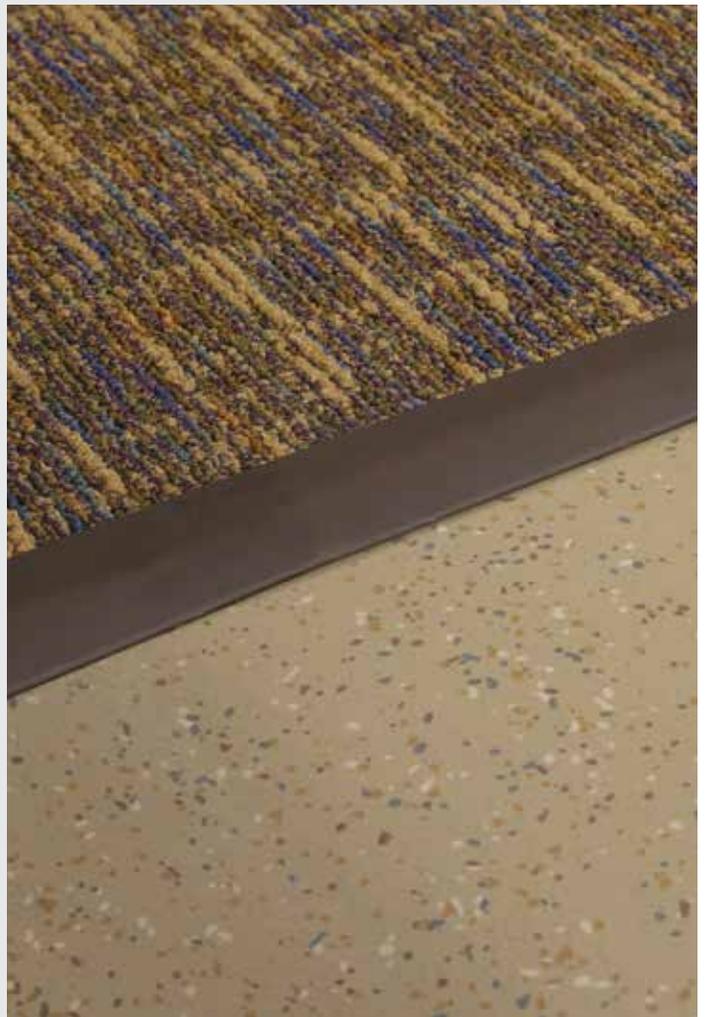

# finishing accessories

## Finishing touches.

No project is complete without them. And the right touches bring all of the design elements in a space together.

When invited, they can be high contrast – as architectural or color accents. Or they can fade into the background, performing key functions that enable featured design elements to shine.

Our premium finishing accessories include a broad range of moldings, transitions, cove supports, and corner guards that finish your project space and protect your finished design.

# finishing accessories



FINISHING ACCESSORIES

# finishing accessories

transitional moldings					
product	application	profile	description	color	packaging
140 carpet reducer - 1/4"	carpet		reduces 1/4" flooring to 0". 1 1/4" transition.	Sync	15-20' secs. per carton (300 feet)
146 universal reducer - 3/8"	carpet, ceramic, wood & resilient		reduces 3/8" materials to 0". 1 5/8" transition.	Sync	10-12' secs. per carton (120 feet)
147 material to substrate reducer - 3/8"	overlaps sports flooring, ceramic & wood		reduces 3/8" materials.	Sync	10-12' secs. per carton (120 feet)
148 material to substrate reducer - 3/8"	ceramic, carpet & wood		transition from 3/8" thick rubber sports flooring, ceramic, carpet or wood to the substrate over a 4" width.	Sync	10-12' secs. per carton (120 feet)
149 material to substrate reducer - 1/2"	ceramic, carpet & wood		transition from 1/2" thick rubber sports flooring, ceramic, carpet or wood to the substrate over a 4" width.	Sync	5-12" secs. per carton (60 feet)
160 universal reducer	carpet, ceramic & wood		edge reducer for 1/2" materials. 2" transition.	Sync	10-12' secs. per carton (120 feet)
165 carpet to resilient reducer - 1/4"	carpet & resilient		reduces 1/4" to 1/8" resilient in a 2" wide span for wheeled traffic.	Sync	10-12' secs. per carton (120 feet)
170 carpet transitional reducer	carpet		9/32" reducer with 2 1/2" transition.	Sync	10-12' secs. per carton (120 feet)
174 wedge-shaped reducer - 1/8"	flooring with heavy rolling loads		reduces 1/8" materials.	Sync	1-100' coil per carton (100 feet)
175 carpet ramp	carpet		1/4" reducer with 4" transition. for heavy rolling traffic.	Sync	10-12' secs. per carton (120 feet)
176 laminates to substrate reducer - 5/8"	laminates		substrate reducer transitions from 1/8" to the substrate	Sync	6-12' secs. per carton (72 feet)
200 royal commercial reducer	carpet		transition reducer. 5/16" undercut for use with tackless or double-stick installations.	Sync	10-12' secs. per carton (120 feet)
630 tile reducer - 1/16"	resilient		butts to reduce gauge of resilient to 0". 1" x 36" x 1/16".	Sync	50-3' secs. also available in 2-100' coils
632 tile reducer - 3/32"	resilient		butts to reduce gauge of resilient to 0". 1" x 36" x 3/32".	Sync	50-3' secs. also available in 2-100' coils
633 tile reducer - 1/8"	carpet		butts to reduce gauge of resilient to 0". 1" x 36" x 1/8".	Sync	50-3' secs. also available in 2-100' coils
700 imperial reducer - 5/16"	carpet		1 11/32" transition reducer. for glue-down carpet; 5/16" undercut. can be trimmed to butt to tile.	Sync	20-12' secs. per carton (240 feet)
705 super imperial reducer	carpet		1 15/16" heavy duty transition reducer. for glue-down carpet; 5/16" undercut. can be trimmed to butt to tile.	Sync	10-12' secs. per carton (120 feet)
735 underslung reducer	resilient		binder-bar edging for 1/16" to 1/8" resilient floors.	Sync	2-35' coils per carton (70 feet)
800 imperial reducer - 1/4"	carpet		1 1/4" transition reducer. for glue-down carpet; 1/4" undercut. can be trimmed to butt to resilient tile.	Sync	20-12' secs. per carton (240 feet)
900 imperial reducer - 3/16"	carpet		1 1/16" transition reducer. for glue-down carpet; 3/16" undercut. can be trimmed to butt to resilient tile.	Sync	20-12' secs. per carton (240 feet)



Mannington's moldings meet the requirements of Sec. 4.5.2 (change in level) and 4.5.3 (carpet edge trim compliance) of the Americans with Disability Act.

Mannington Finishing Accessories are available in the Sync™ color coordinating system unless otherwise noted.

# finishing accessories

joining moldings					
product	application	profile	description	color	packaging
150	tile carpet joiner		one-piece molding. joins 1/4" carpet to 1/8" tile.	Sync	25-12' secs. per carton (300 feet)
152	carpet to resilient		transitions 1/4" or 5/16" glue-down carpet to 1/16" to 1/8" resilient.	Sync	20-12' secs. per carton (240 feet)
153	cercos bar 3/8"		one-piece molding for joining 5/16" carpet to 3/8" ceramic materials.	Sync	10-12' secs. per carton (120 feet)
360	cercos T		snap-in t molding. joins 1/2" material. uses 970, 980, or 990 track only.	Sync	20-12' secs. per carton (240 feet)
365	cercos edge T		joins 1/2" material to lesser-gauge material. uses 970, 980, or 990 track only.	Sync	20-12' secs. per carton (240 feet)
370	end cap T		butts up against edge of 1/2" material to lesser-gauge material. uses 970, 980, or 990 track only.	Sync	20-12' secs. per carton (240 feet)
710	carpet resilient		transitions 5/16" glue-down carpet to 1/8" resilient.	Sync	10-12' secs. per carton (120 feet)
930	snap down T		snap-in t molding. joins 1/4" or 5/16" material on each side. uses 970, 980, or 990 track only.	Sync	20-12' secs. per carton (240 feet)
935	super 2" T		snap-in t molding. joins 1/4" or 5/16" material on each side. uses 970, 980, and 990 track only.	Sync	20-12' secs. per carton (240 feet)
940	standard edge T		joins 1/4" to lesser gauge. 1 1/8" wide; 1/4" leg. uses 970, 980, or 990 track only.	Sync	20-12' secs. per carton (240 feet)
970	single flange vinyl track		for 1/4" and 1/2" leg t portions. use with 360, 365, 930, 935 & 940 t's.	Light neutral color	20-12' secs. per carton (240 feet)
975	vinyl track extender		adds height up to 5/8" on snap-in t molding for ceramic, wood, and laminates. use with 970 track for 360, 365, 930, 935, and 940 t's.	Light neutral color	20-12' secs. per carton (240 feet)
980	pinless metal track		designed to install t moldings 360, 365, 930, 935 and 940. aluminum.	Metal	48-12' secs. per carton (576 feet)
990	metal track with pins		designed to install t moldings 360, 365, 930, 935 and 940. aluminum.	Metal	48-12' secs. per carton (576 feet)



150 - Tile-Carpet Joiner - 1/8"



152 - Carpet to Resilient Transition - 1/8"



935 - Super 2" T - 1/4"



153 - Cercos Bar - 3/8"


mat edge moldings					
product	application	profile	description	color	packaging
420	mat edging carpet		flexible vinyl for protecting edges of floor mats 3/16" butt edge. 1 5/8" transition.	901 Night Black only	2-50' coils per carton (110 feet)
425	mat edging carpet		flexible vinyl for protecting edges of floor mats 3/8" butt edge. 1 5/8" transition.	901 Night Black only	2-50' coils per carton (110 feet)



Mannington's moldings meet the requirements of Sec. 4.5.2 (change in level) and 4.5.3 (carpet edge trim compliance) of the Americans with Disability Act.




Mannington Finishing Accessories are available in the Sync™ color coordinating system unless otherwise noted.




# finishing accessories

tub moldings				
product	profile	description	color	packaging
060 tub molding (self-stick)		mirror-finish® cove for bathtub, counter, and shelves; 1 1/2" height.	934 butter 935 cameo white	24-5' sections per carton (120 feet)
605 tub moulding (self-stick)		mirror-finish® cove for bathtub, counter, and shelves; 1" height.	934 butter 935 cameo white	24-5' sections per carton (120 feet)

miscellaneous moldings				
product	profile	description	color	packaging
655 utility molding - 3/4"		finish moulding for inside any right angle.	934 butter 935 cameo white	25-5' secs. per carton (125 feet)
645 quarter round - 1/2"		quarter round with self adhesive backing	Sync and 933, 935, 939, 940, 955	20-12' secs. per carton (125 feet)

flexible corner guards				
product	profile	description	color	packaging
691 flexible corner guard		90° angular shaped profile with 2 1/2" return legs. legs taper from 7/32" at nose to 3/16" at tip.	Sync	6-54" secs. (27 feet) per carton or 6-108" secs. (54 feet) per carton
693 flexible corner guard		90° angular shaped profile with 3/4" return legs. 1/8" leg thickness.	Sync	20-54" secs. (90 feet) per carton* or 20-108" secs. (180 feet) per carton*
695 flexible corner guard		90° angular shaped profile with 1 1/2" return legs. 1/8" leg thickness	Sync	20-54" secs. (90 feet) per carton* or 20-108" secs. (180 feet) per carton*
696 corner guard		edge effects sculptured wall base corner guard - 1" return legs	Sync and 933, 935, 939, 940, 955	20-8' secs. (160 feet) per carton

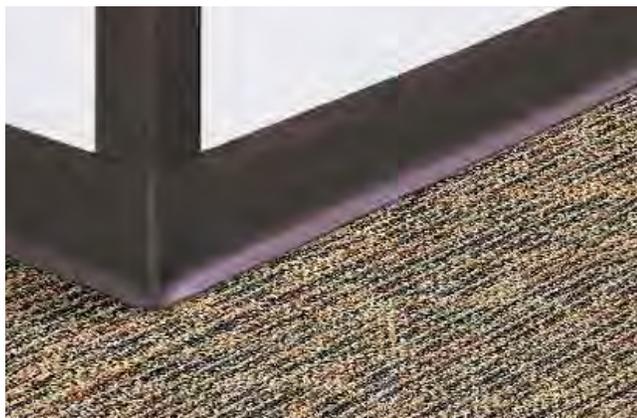

Flexible corner guards provide color-coordinated wall protection at outside wall corners... one of the most vulnerable areas for chipping of wall material.

Mannington's moldings meet the requirements of Sec. 4.5.2 (change in level) and 4.5.3 (carpet edge trim compliance) of the Americans with Disability Act.



Mannington Finishing Accessories are available in the Sync™ color coordinating system unless otherwise noted.

# finishing accessories

edge finishing moldings					
product	application	profile	description	color	packaging
022 carpet cove cap	carpet		semi-rigid capping. for 1/4" and 5/16" covered carpet; one-man installation.	Sync	20-12' secs. per carton (240 feet)
040 round cap - 1/8"	resilient		cap for covered sheet goods. 1/8" gauge; round top.	Sync	50-12' secs. per carton (600 feet)
225 flex cove cap	carpet		cap for 3/16" covered/glue-down carpet.	Sync	20-12' secs. per carton (240 feet)
230 mono edge	carpet		flexible capping. for 1/4" covered/glue-down carpet or grass; one-man installation.	Sync	20-12' secs. per carton (240 feet)
390 square cap - 1/8"	resilient		cap for 1/8" covered sheet vinyl.	Sync	50-12' secs. per carton (600 feet)
400 custom edge	carpet		bevel-edge reducer. for 5/16" carpet; deep undercut.	Sync	25-12' secs. per carton (300 feet)
430 mercap - 9/32"	carpet ceramic wood		cap for covered carpet, paneling, and ceramics. 9/32" inside dimension.	Sync	50-12' secs. per carton (600 feet)
450 square cap - 1/4"	carpet wood		square cap for covered carpets and wood panels.	Sync	40-12' secs. per carton (480 feet)


cove supports with edge					
product	application	profile	description	color	packaging
070	resilient cove stick (flexible)		quarter-round. supports sheet goods for coving. forms 1" radius at 90° installation.	935 cameo white	5-20' coils per carton (100 feet)
075	resilient		quarter round. supports sheet goods for coving. forms 1" radius at 90° installation.	900 natural	100-5' secs. per carton (500 feet)
725	resilient		coving support for sheet vinyl. replaces wood cove. forms 1" radius at 90° installation.	900 natural	100-5' secs. per carton (500 feet)

Mannington's moldings meet the requirements of Sec. 4.5.2 (change in level) and 4.5.3 (carpet edge trim compliance) of the Americans with Disability Act.




# finishing accessories

subfloor leveling system				
product	profile	description	color	packaging
189		12" subfloor reducer 1/8" X 12"	901 only	20-4' secs. per carton (80 feet)
190		12" subfloor reducer - 1/4" x 12"	901 only	10-4' secs. per 40' carton
191		12" subfloor reducer - 3/8" x 12"	901 only	5-4' secs. per 20' carton
192		12" subfloor reducer - 1/2" x 12"	901 only	5-4' secs. per 20' carton

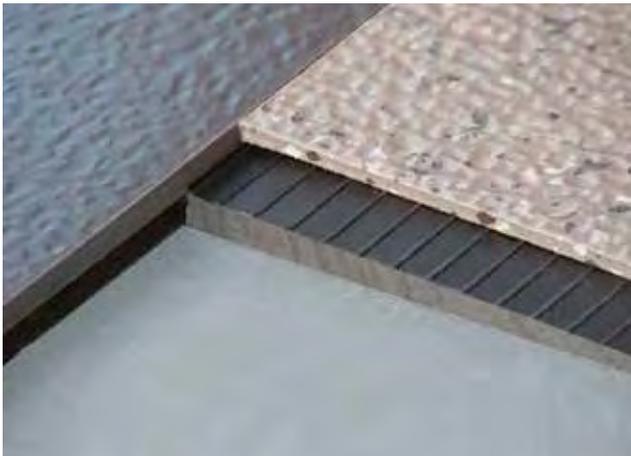

Mannington's subfloor transitional reducers solve the problem of slight differences in elevation between flooring surfaces. Traditional methods of using patching compounds are eliminated, so transitions are done more quickly and more accurately. Some of the advantages include;

- Scoring marks placed at common thicknesses
- No waiting time for leveling compounds to cure
- Ribbed back helps promote better adhesion
- Designed to be installed over concrete, wood and steel subfloors

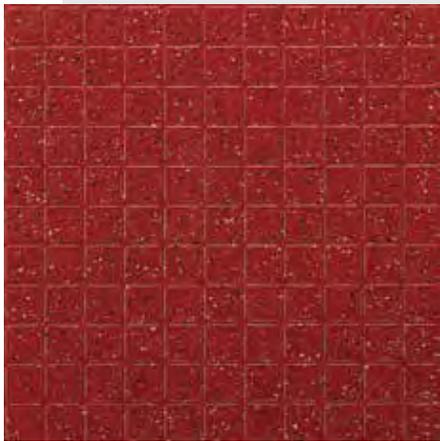

# specifications & adhesives

**specifications &  
adhesives**

# specifications

style	construction	heights/size	lengths	profile
Optimum Edge wall base	Molded thermoset vulcanized SBR rubber, Type TS	2 1/2" (63.5 mm) , 4" (101.6 mm), 6"(152.4 mm)	4' (1219.2 mm) length 100' rolls in cove only	Coved or Toeless
Premium Edge wall base	Co-extruded thermoplastic rubber, Type TP	2 1/2" (63.5 mm) 4" (101.6 mm) 4 1/2" (114.3 mm) 6"(152.4 mm)	4' (1219.2 mm) strip and 100' (3048.0 cm) roll	Coved or Toeless
Mannington Edge wall base	Co-extruded thermoplastic vinyl, Type TV	2 1/2" (63.5 mm) 4" (101.6 mm) 4 1/2" (114.3 mm) 6"(152.4 mm)	4' (1219.2 mm) strip and 100' (3048.0 cm) roll	Coved or Toeless
Edge Effects sculptured wall base	Co-extruded thermoplastic rubber, Type TP	3" up to 6" (Style Dependent)	25', 36' and 50' rolls style dependent	15 Profiles including Chair Rail and Quarter Round (Style Dependent)
Audio Spectra rubber tile	Thermoset rubber	12" x 24"	n/a	Hola, Silence, Tic Toc 5/16" frame around each tile
ColorScape rubber tile	Thermoset rubber	18 1/8" x 18 1/8" (460 mm x 460 mm)	n/a	.025" raised profile Round, square & sculptured
ColorSpec rubber tile	Thermoset rubber	18 1/8" x 18 1/8" (460 mm x 460 mm)	n/a	.025" raised profile Square & sculptured
ColorFields rubber sheet & tile	Thermoset rubber	4' x 49.2' (1.2m x 18.3m) sheet 24" x 24" (610mm x 610mm) tile 23 3/4" x 23 3/4" (603mm x 603mm) tile	196.8 sq. ft. min (18.5m <sup>2</sup> ) roll size	smooth profile
Reset rubber sports flooring	Recycled rubber	18" x 18" tile 4' x 50 sheet 24" x 24" interlocking	n/a	n/a
Enforcer Spike and Skate resistant rubber tile	Thermoset rubber	36" x 36" (914.4 mm x 914.4 mm)	n/a	Sculptured with square edge
ColorScape stair treads	Thermoset rubber, Type TS	Refer to stair treads section for specific dimensions	4', 5' and 6'	Round or Square Visually-Impaired Options
ColorSpec stair treads	Thermoset rubber, Type TS	Refer to stair treads section for specific dimensions	4', 5' and 6'	Round or Square Visually-Impaired Options
ConnectStep tread / riser combination stair tread	Thermoset rubber, Type TS	Automatically adjust for step depths between 9 1/2" and 13"	4', 5' and 6'	ColorScape - Round or Sculptured, Visually-Impaired Options ColorSpec - Sculptured, Visually Impaired Options
Linear stair treads Commercial 250 (Type TP and Type TV) Commercial 210 (Type TV) Commercial 150 (Type TV) Safety Tread with VI Insert (Type TP)	Thermoplastic rubber Type TP and vinyl Type TV	Refer to stair treads section for specific dimensions	3', 3 1/2', 4', 5', 6', 8', and 12'	Various ribbed profiles, refer to stair treads section for specific information
Stair Nosing	Thermoplastic rubber, Type TP	Refer to stair treads section for specific dimensions	Refer to stair treads section for specific dimensions	Refer to stair nosings section for specific information
Finishing Accessories	Thermoplastic vinyl, Type TV	Refer to finishing accessories for specific dimensions	Refer to finishing accessories for specific dimensions	Various transitions, joinings, and edging moldings along with corner guards, cove supports and subfloor leveling systems are available. Refer to finishing accessories for specific dimensions

# specifications

corners	color	overall thickness	Specification	installation adhesive	warranty
Factory molded, specify jobsite wrapped or molded N/A Optimum Edge 100 Rolls	69 colors including 25 Sync Color Coordination System	1/8" (3.175 mm)	ASTM F-1861 Type TS, Group 1	Mannington MR-101 Acrylic Wall Base Adhesive	Limited 5 Year Commercial Warranty
Factory Pre-formed, specify jobsite wrapped or factory pre-formed	70 colors including 25 Sync Color Coordination System	1/8" (3.175 mm)	ASTM F-1861 Type TP, Group 1	Mannington MR-101 Acrylic Wall Base Adhesive	Limited 5 Year Commercial Warranty
Factory Pre-formed, specify jobsite wrapped or factory pre-formed	70 colors including 25 Sync Color Coordination System	.080 in. & 1/8" (3.175 mm) 4 1/2" = 1/8" only	ASTM F-1861 Type TV, Group 1	Mannington MR-101 Acrylic Wall Base Adhesive	Limited 5 Year Commercial Warranty
Pre-mitered inside and outside corners	25 Sync Color Coordination System, plus 5 neutrals	5/16" up to 1/2" (Style Dependent)	ASTM F-1861 Type TP, Group 1 Style D	Mannington MR-101 Acrylic Wall Base Adhesive Double Sided Tape	Limited 5 Year Commercial Warranty
n/a	16 colorways	1/8" (3.175 mm)	ASTM F-1344 Class 1-A	Mannington MR-721 Epoxy Adhesive or MR-725 Polyurethane Adhesive or MR-911 One Part Acrylic Adhesive for above-grade and stairwell applications Double Sided Tape	Limited 10 Year Wear Warranty, Limited 10 Year Commercial Warranty
n/a	ColorScape 25 Sync Color Coordination System	1/8" (3.175 mm)	ASTM F-1344 Class 1-A	Mannington MR-721 Epoxy Adhesive or MR-725 Polyurethane Adhesive or MR-911 One Part Acrylic Adhesive for above-grade and stairwell applications Double Sided Tape	Limited 10 Year Wear Warranty, Limited 10 Year Commercial Warranty
n/a	ColorSpec 22 Fleck Colors	1/8" (3.175 mm)	ASTM F-1344 Class 1-B	Mannington MR-721 Epoxy Adhesive or MR-725 Polyurethane Adhesive or MR-911 One Part Acrylic Adhesive for above-grade and stairwell applications Double Sided Tape	Limited 10 Year Wear Warranty, Limited 10 Year Commercial Warranty
n/a	ColorFields 21 colorways	.118 (3mm) sheet or tile	ASTM F-1344 Class 1-A-Grade B Tile ASTM F-1859 - Type 1, Class A, Grade B sheet	MR-911 One Part Acrylic Adhesive or MR-710 One Part Polyurethane Adhesive	Limited 5 Year Wear Warranty Limited 10 Year Commercial Warranty
n/a	9 colorways	3/8" nominal	n/a	MR-710 One Part Urethane Adhesive MR-725 Two Part Polyurethane Adhesive	Limited 5 Year Commercial Warranty
n/a	6 ColorScape (solid) colors 6 ColorSpec (fleck) colors	1/4" nominal	ASTM-F 1344 Class 1-A (colorscape) ASTMF-1344 Class 1-B (colorspec)	MR-721 Epoxy Adhesive MR-725 Two Part Polyurethane Adhesive	Limited 10 Year Wear Warranty, Limited 10 Year Commercial Warranty
n/a	ColorScape 25 Sync Color Coordination System	1/8" (3.175 mm)	ASTM 2169	Mannington MR-721 Epoxy Adhesive or MR-725 Polyurethane Adhesive or MR-911 One Part Acrylic Adhesive for above-grade and stairwell applications Double Sided Tape	Limited 5 Year Stair Nosing Warranty, Limited 10 Year Wear Warranty, Limited 10 Year Commercial Warranty
n/a	ColorSpec 22 Fleck Colors	1/8" (3.175 mm)	ASTM 2169	Mannington MR-721 Epoxy Adhesive or MR-725 Polyurethane Adhesive or MR-911 One Part Acrylic Adhesive for above-grade and stairwell applications Double Sided Tape	Limited 5 Year Stair Nosing Warranty, Limited 10 Year Wear Warranty, Limited 10 Year Commercial Warranty
n/a	ColorScape - 25 Sync Color Coordination System ColorSpec - 22 Fleck Colors	Refer to stair treads section for specific dimensions	ASTM 2169	Mannington MR-721 Epoxy Adhesive or MR-725 Polyurethane Adhesive or MR-911 One Part Acrylic Adhesive for above-grade and stairwell applications Double Sided Tape	Limited 5 Year Stair Nosing Warranty, Limited 10 Year Wear Warranty, Limited 10 Year Commercial Warranty
n/a	25 Sync Color Coordination System	Refer to stair treads section for specific dimensions	ASTM 2169	Mannington MR-911 Acrylic Adhesive Mannington Nose Filler MR-715 Solvent-Free Epoxy Nose Filler required	Limited 5 Year Commercial Warranty
n/a	25 Sync Color Coordination System	Refer to stair treads section for specific dimensions	n/a	Mannington Nose Filler MR-721 Epoxy	Limited 5 Year Commercial Warranty
n/a	25 Sync Color Coordination System	Refer to finishing accessories section for specific dimensions	n/a	Mannington Double Sided Tape System 1" or 6" or commercially available contact bond adhesive - follow manufacturer's recommendations and warnings	Limited 5 Year Commercial Warranty

# adhesives

## MR-911 Acrylic Adhesive

For use with Mannington Rubber Tile, Rubber and Vinyl Stair Treads.

MR-911 Acrylic Adhesive is a water resistant, solvent-free, high strength water based acrylic latex adhesive specially formulated for the installation of Mannington Commercial rubber and vinyl flooring and stair treads on clean porous and non-porous surfaces. MR-911 is suitable for use on suspended wood floors, dry concrete floors and staircases above or on grade where concrete substrate moisture does not exceed manufacturer's recommendations. Concrete substrate moisture must be tested by using either ASTM F-1869 Calcium Chloride Test Method with results not exceeding 3 pounds per 24 hours per 1000 square feet or ASTM F-2170 Determination of Relative Humidity within the Concrete (in situ) Test Method with results not exceeding 75%.

## MR-715 Solvent-Free Two Part Epoxy Nose Filler

For use with Mannington Rubber, Vinyl Stair Treads as Nose Filler.

MR-715, a Two Part Epoxy, high strength adhesive specially formulated for the installation of Mannington Commercial Rubber & Vinyl Stair Treads and Nose Filler.

Type TP and Vinyl Type TV stair treads require the use of Mannington MR-715, a Two Part Epoxy Nose Filler. This prevents subsequent nose flexing when there is a gap between the stair step and the stair tread nose.

## MR-101 Acrylic Wall Base Adhesive

For use with Mannington Rubber and Vinyl Wall Base Products.

MR-101 Acrylic Wall Base Adhesive has been specifically designed for the installation of Mannington Commercial Rubber and Vinyl Wall Base Products. This adhesive is solvent-free, non-flammable water based, adhesive, with an emission rate of "0 grams/liter" VOC's. MR-101 has been designed for the permanent installation of wall base on most interior wall surfaces with the exception of over vinyl wall covering and other similar non-porous surfaces. This adhesive, once set provides an extremely strong, water resistant bond with excellent corner wrapping properties.

## MR-721 Solvent-Free Two Part Epoxy Adhesive

For use with Mannington Rubber Tile and Rubber & Vinyl Stair Treads.

MR-721, a Two Part Epoxy, high strength adhesive specially formulated for the installation of Mannington Commercial Rubber & Vinyl Stair Treads on clean porous and non-porous surfaces. MR-721 is suitable for use on suspended wood floors

and dry concrete floors and staircases above, on and below grade.

## MR-725 Solvent-Free Two Part Polyurethane Adhesive

MR-725 Polyurethane Adhesive is a waterproof, solvent free, high strength polyurethane adhesive specially formulated for the installation of Mannington Commercial Rubber Tile, Rubber and Vinyl Tile and Stair Treads on clean porous and non-porous surfaces. MR-725 is suitable for use on suspended wood floors and dry concrete floors and staircases above, on, and below grade where concrete substrate moisture does not exceed manufacturers recommendations. Concrete substrate moisture must be tested by using either ASTM F-1869 Calcium Chloride Test Method with results not exceeding 3 pounds per 24 hours per 1000 square feet or ASTM F-2170 Determination of Relative Humidity within the Concrete (in situ) Test Method with results not exceeding 75%.

## MR-710 Moisture-Cured, Urtehane Adhesive


MR-710 is a solvent free, single component polyurethane adhesive formulated specifically for use with Mannington Commercial Reset Recycled Rubber Sports Flooring tile and sheet products. MR 710 contains antimicrobial protection and is freeze thaw stable. Spread MR-710 evenly with the proper trowel. Open time is influenced by substrate porosity and atmospheric conditions (i.e. temperature, humidity, and air movement.) For best results maintain adhesive, floor covering, and room at a stable temperature of 65° F to 85° F for 24 hours before and after installation. Within 30-40 minutes, cut, fit and reposition the floor covering as recommended. Roll the installation using a three-section 100lb roller.




## Mannington Double-Sided Stair Tread Adhesive Tape

Mannington Double-Sided Adhesive Tape is a high strength, reinforced, double-sided adhesive tape system designed to minimize stair tread installation expense and to allow immediate foot traffic in stair well areas that cannot be closed. It also eliminates the need to install during premium shift times due to adhesive odor related considerations.

Mannington Double-Sided Adhesive Tape is supplied in rolls. The tape is 1" or 6" wide by 64' long. The 6" width accommodates both Mannington's two piece and single piece ConnectStep tread and riser combination.

NOTE: MANNINGTON DOUBLE-SIDED ADHESIVE TAPE IS NOT TO BE USED TO INSTALL LANDING TILE.

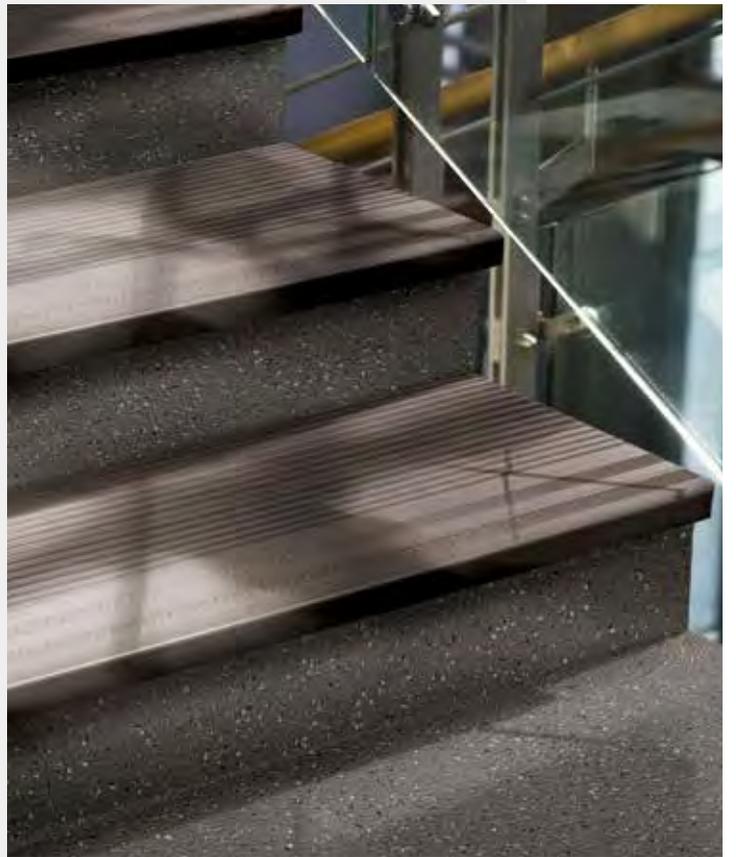

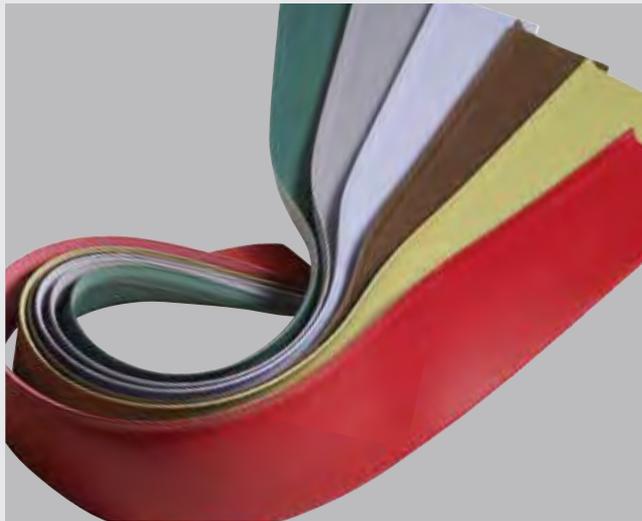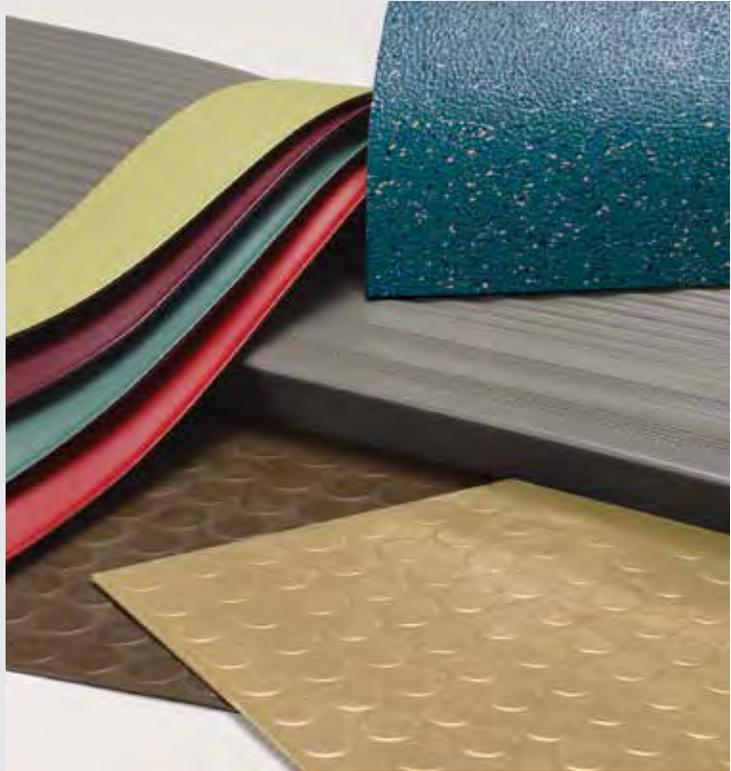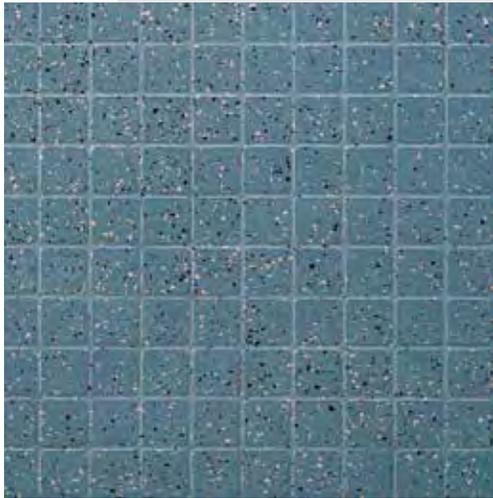

# color choices

Select from a palette of over 70 hues and for total integration, look to our 25-color Sync™ Color Coordination System.

Sync offers 25 colors that span the entire spectrum of premium rubber flooring products, including wall base, tiles, stair treads and finishing accessories.


# color choices

ColorScape rubber tile and stair treads are available in Mannington's Sync™ Color Coordination System.


**AUDIO SPECTRA**  
rubber tile



**COLORSCAPE (c)** rubber tile and stair treads  
**ENFORCER (e)** spike and skate resistant tile

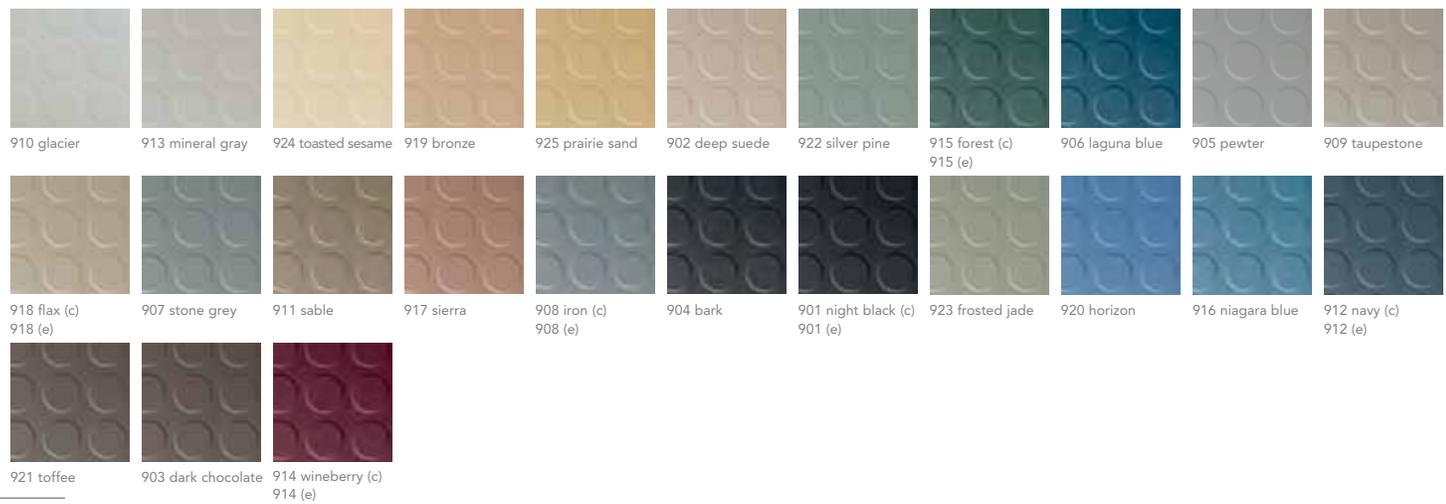

**COLORSPEC (cs)** rubber tile and stair treads  
**ENFORCER (e)** spike and skate resistant tile

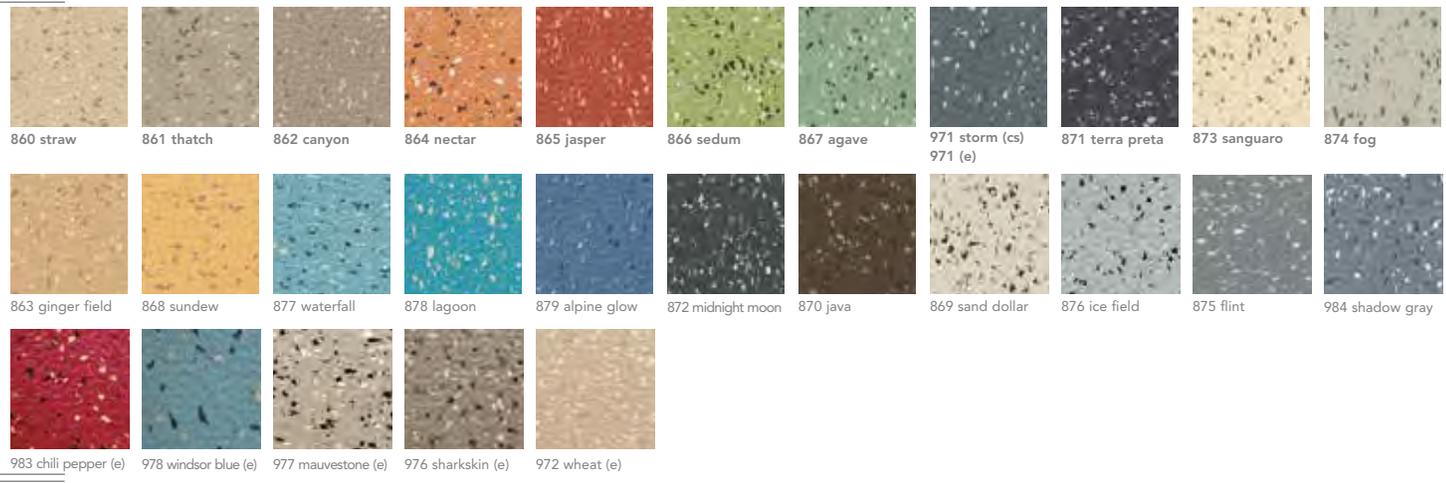

**COLORFIELDS**  
sheet & tile rubber flooring



**RESET**  
recycled rubber flooring



**Custom colors available.**  
**Contact your Mannington representative.**  
Printed colors may vary slightly from actual product.  
Please refer to actual sample when making final color selection.





Mannington's Sync™ Color Coordination System offers 25 color choices across the entire line of premium rubber flooring including wall base, tiles, stair treads and finishing accessories.

EDGE EFFECTS SCULPTURED WALL BASE  
LINEAR STAIR TREADS AND NOSINGS  
FINISHING ACCESSORIES

910 glacier	913 mineral gray	924 toasted sesame	919 bronze	925 prairie sand	902 deep suede	922 silver pine	905 pewter	909 taupestone
918 flax	907 stone gray	911 sable	917 sierra	908 iron	923 frosted jade	920 horizon	916 niagara blue	912 navy
921 toffee	903 dark chocolate	914 wineberry	915 forest	904 bark	906 laguna blue	901 night black		
935 cameo white*	939 cool white*	955 oyster white*	934 butter	937 bisque	928 wheat	940 almondine*	936 cool beige	933 sandrift*
954 adobe	957 banana cream	969 chamois	941 agate	945 woodrose	970 wedgewood	962 tarragon	959 golden oak	951 mauvestone
950 dusty rose	961 asparagus	943 lilac mist	931 otter brown	956 ironwood	947 brownstone	942 bedrock	948 blueridge	944 steel blue
958 olivia	960 deep fern	949 verde	927 spruce	946 dark denim	968 pecan	930 coffee	952 black cherry	963 apricot haze
966 new geranium	965 new eggplant	967 atlantis	964 evergreen	929 brown earth	953 rain forest	926 deep sea blue	938 midnight	932 espresso

WALL BASE - OPTIMUM EDGE, PREMIUM EDGE AND MANNINGTON EDGE

Note: Color 935 not available in Optimum Edge wall base  
\* Additional Edge Effects colors - 935,939,955,940 and 933

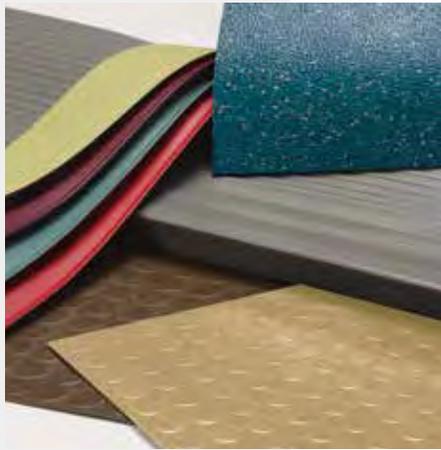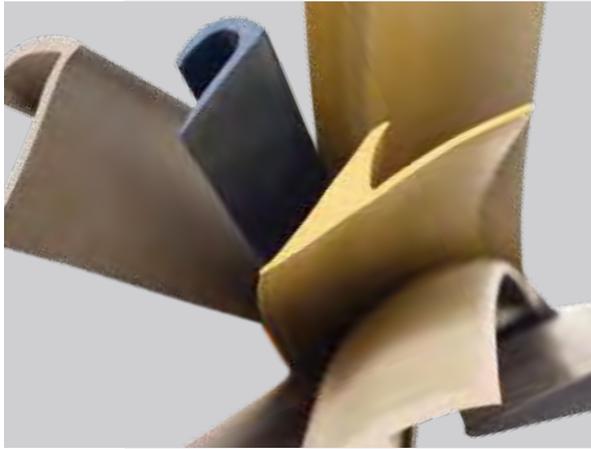

Choices that Work

800 241 2262 [manningtoncommercial.com](http://manningtoncommercial.com)