



Color Anchor Collection

Mannington
COMMERCIAL




Cover: ColorSpec Tile - Unbleached Silk 093, English Pea 177

Above: ColorScape Tile - Sky Gray 663, **ColorSpec Tile** - Tail Feather 078, Island Sky 037, Nautical Twilight 171

Color Anchor Modular Carpet - Squawk 33647



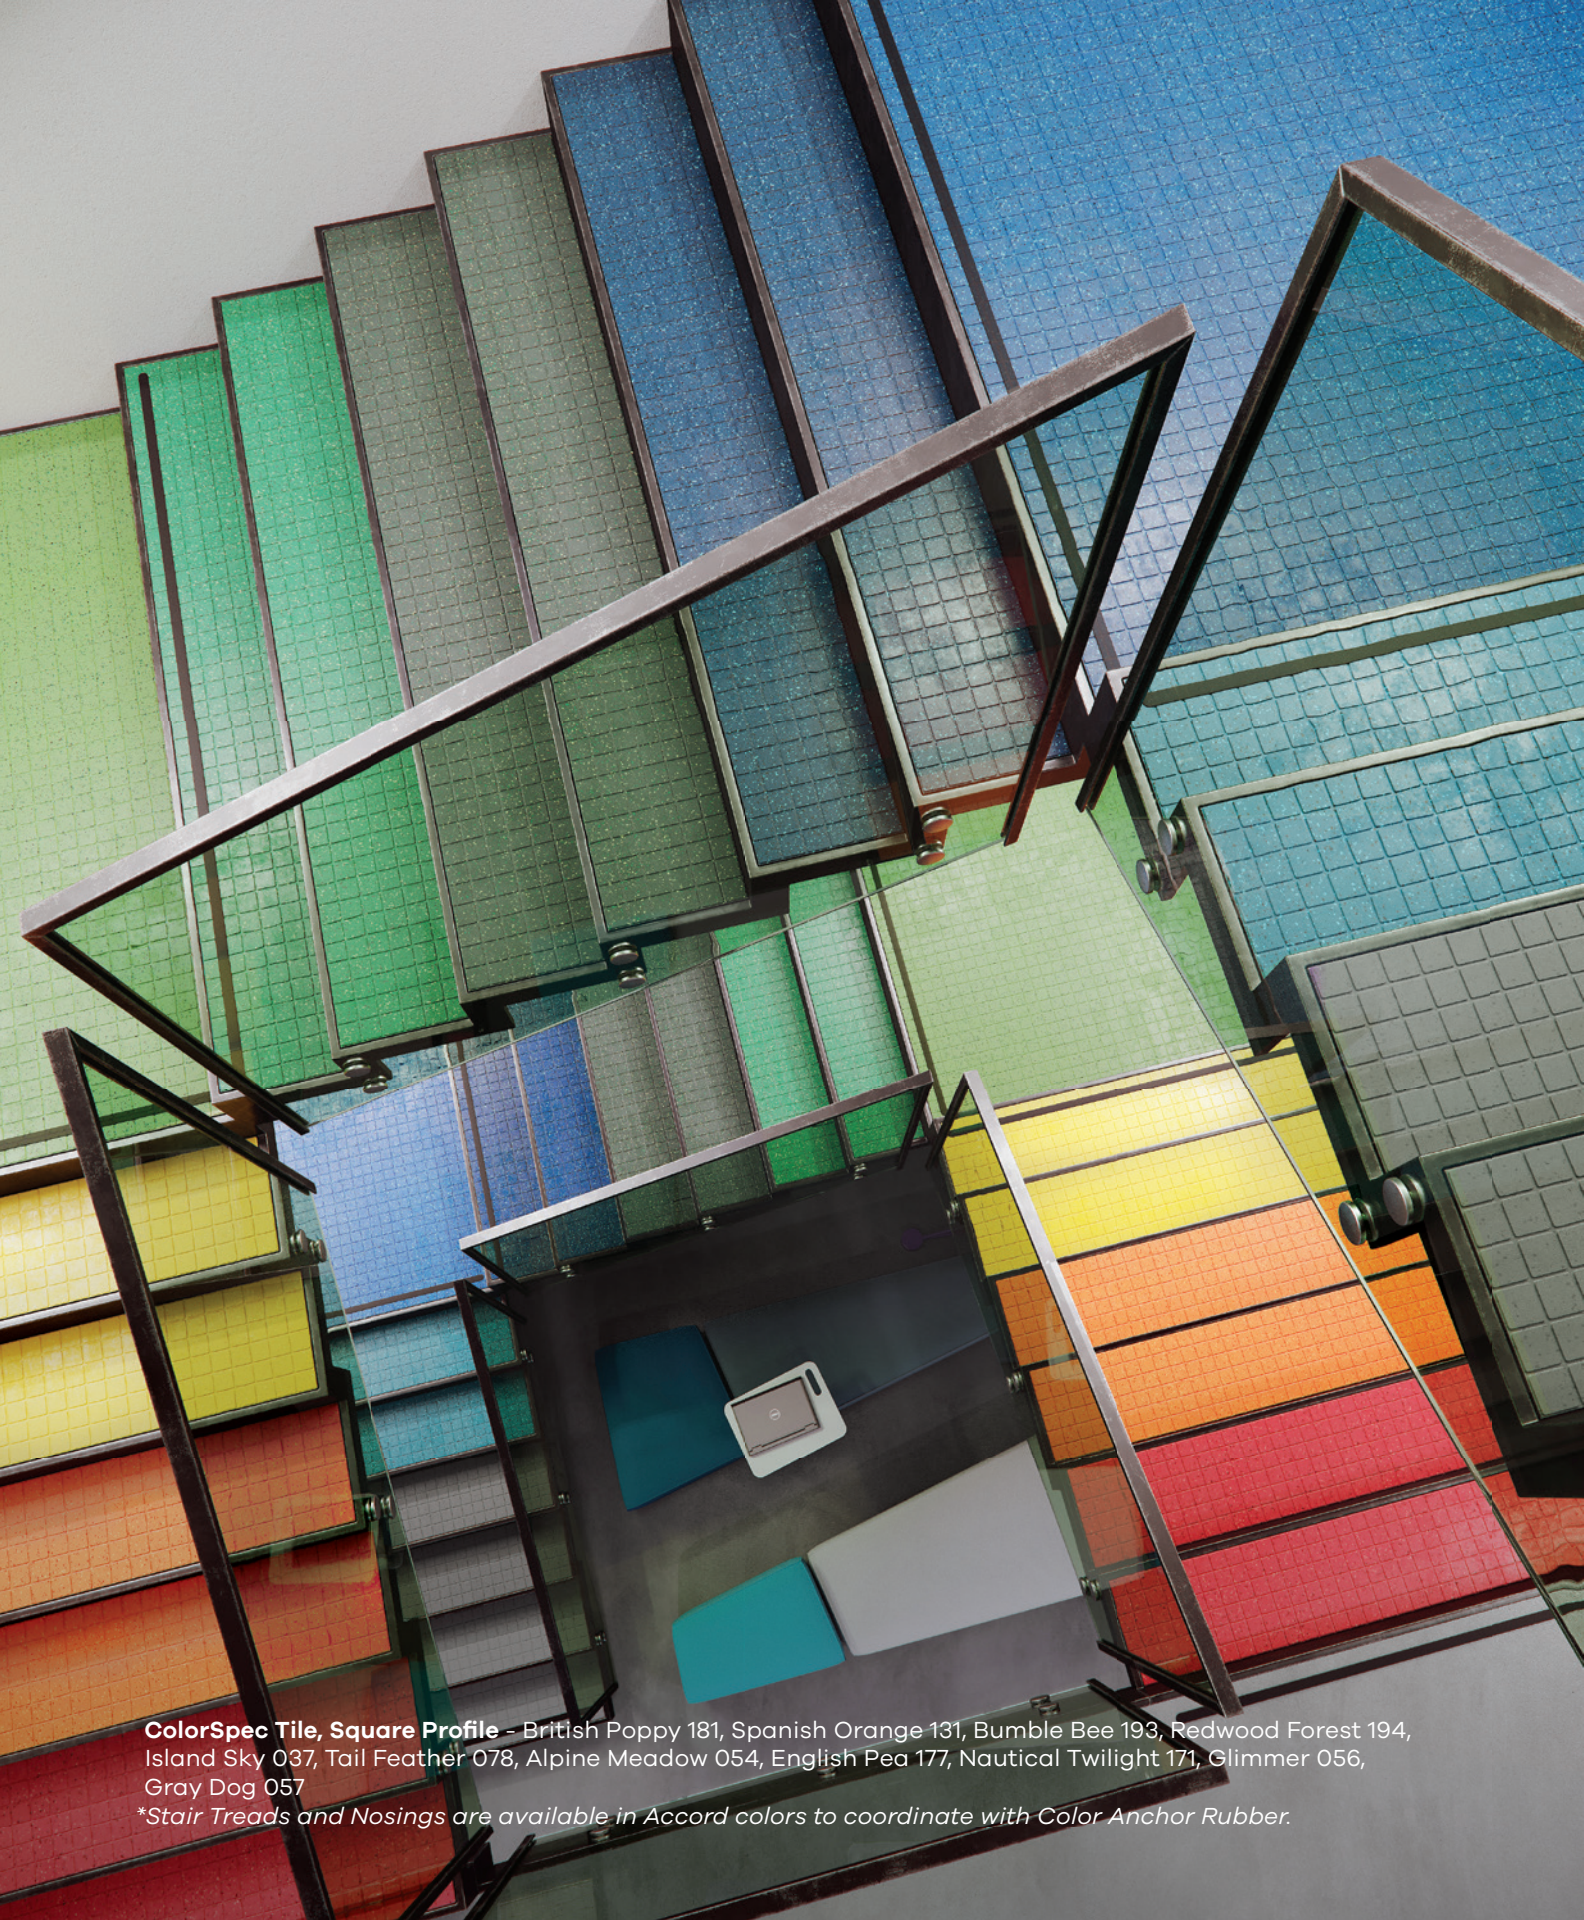

ColorSpec Tile, Square Profile - British Poppy 181, Spanish Orange 131, Bumble Bee 193, Redwood Forest 194, Island Sky 037, Tail Feather 078, Alpine Meadow 054, English Pea 177, Nautical Twilight 171, Glimmer 056, Gray Dog 057

**Stair Treads and Nosings are available in Accord colors to coordinate with Color Anchor Rubber.*

Accord Colors

The Accord System offers 36 color choices that span the entire spectrum of premium rubber flooring products, including wall base, tiles, stair treads and finishing accessories.

Custom colors available for a minimum.

					
Almond 403	Off White 244	Beach Sand 030	Light Gray 208	Frosted Jade 210	Mocha 597
					
Cream 205	Baja 519	Sky Gray 663	Carmine Gray 674	Daffodil 820	Mango 070
					
Desert Sand 118	Gray Beige 209	Jackalope 190	Ash 603	Sugar Snap 055	Geranium 966
					
Ginger 503	Sandy Tan 112	Gray 204	Gray Blue 672	Mountain Meadow 077	Peacock 120
					
Tumbleweed 033	Clay 527	Moonbeam 050	Rocky 660	Dark Forest 331	Ocean Blue 115
					
Pecan 504	Brown 502	BlackBrown 523	Charcoal 217	Black 701	Navy 875

Color Anchor Collection

Find your perfect flooring coordinate with Color Anchor, a collection of high-performance rubber, resilient sheet, LVT and modular tile available in a wide variety of colors. Color Anchor is made for mixing – the products are designed to complement other Mannington Commercial flooring collections and also mix beautifully with each other. Because the collection offers a complete range of product types, it's simple to create cohesive designs across spaces with different flooring needs.



Color Anchor Collection

Style	ColorScope® Tile	ColorSpec® Tile
Construction	Thermoset Rubber Tile	Thermoset Rubber Tile
Classification	ASTM F1344 Class I, Type A	ASTM F1344 Class I, Type A
Total Thickness	1/8" (3.175 mm)	1/8" (3.175 mm)
Profiles	Square, Sculptured, Round	Square, Sculptured, Smooth
Sizes	Square - 18.125" x 18.125" (460 x 460 mm), 36.25" x 36.25" (920.75 x 920.75 mm) Sculptured - 18.125" x 18.125" (460 x 460 mm), 36" x 36" (914.4 x 914.4 mm) Round - 18.125" x 18.125" (460 x 460 mm), 36.125" x 36.125" (917.7 x 917.7 mm)	Square - 18.125" x 18.125" (460 x 460 mm), 36.25" x 36.25" (920.75 x 920.75 mm) Sculptured - 18.125" x 18.125" (460 x 460 mm), 36" x 36" (914.4 x 914.4 mm) Smooth - 18" x 18" (457.2 x 457.2 mm), 36" x 36" (914.4 x 914.4 mm)
Finish	Matte	Matte
Colors	36	36
Packaging	18.125" x 18.125" - 20 pcs, 45.625 ft² (4.239 m²), 43 lbs (19.5 kg) All other sizes sold per piece.	18" x 18" - 20 pcs, 45 ft² (4.181 m²), 42.6 lbs (19.32 kg) 18.125" x 18.125" - 20 pcs, 45.625 ft² (4.239 m²), 43 lbs (19.5 kg) All other sizes sold per piece.
Adhesive	MR-725 Full Spread, 2-part Urethane MR-911 Full Spread, General Purpose Acrylic Note: Must use MR-725 adhesive under hospital beds and heavy rolling loads or where high performance is needed.	MR-725 Full Spread, 2-part Urethane MR-911 Full Spread, General Purpose Acrylic Note: Must use MR-725 adhesive under hospital beds and heavy rolling loads or where high performance is needed.
Testing		
HUD/FHA	Meets or Exceeds	
ADAG (American Disability Act Guidelines)	Passes	
Dimensional Stability (ASTM F2199)	Passes - Max 0.15%	
Squareness (ASTM F540)	Passes - Max 0.010"	
Hardness (ASTM D2240)	Passes - Shore Type A ≥ 85	
Static Load (ASTM F970)	Passes - Residual Indent ≤ 0.005"	
Static Load (ASTM F970 mod.)	Passes - 500 PSI; Residual Indent ≤ 0.005"	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Slip Resistance (ASTM C1028, Dry)	Passes - ≥ 0.5 Leather; 0.6 Rubber	
Acoustic IIC (ASTM E492)	50 - 6" Concrete with Drop Ceiling	
Chemical Resistance (ASTM F925)	Passes - No More Than Slight Change	
Resistance to Heat (ASTM F1514)	Passes - < 8 Delta E Color Change	
Resistance to Mold/Mildew (ASTM G21/E2180)	Passes - No More Than Slight Change	
Environmental Data		
Rapidly Renewable Content	Contains 4% rapidly renewable resource content	
Indoor Air Quality	FloorScore Certified; CDPH v1.1-2010	
Product Declarations	EPD	
LEED Scoreboard	May contribute to LEED credits: LEED 2009: MRC5 Regional Materials; MRC6 Rapidly Renewable Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information	
Manufacturing	Calhoun, GA (USA)	
Warranty		
	Limited 10 Year Commercial Warranty Limited 10 Year Wear Warranty	

- ColorScope and ColorSpec formulations are made with our superior rubber so they retain their amazing color, resist indentations and cracking, and are quiet underfoot. Built-in waxes produce a natural luster that requires no finish or stripping, lowering maintenance costs.
- ColorScope and ColorSpec are not recommended in commercial areas that require static dissipation.
- In spaces that will receive rubber flooring and accessories, maintain a minimum temperature of 65°F (18°C) and a maximum temperature of 85°F (29°C) for at least 48 hours before, during and for not less than 48 hours after installation. Thereafter, maintain a minimum temperature of 55°F (13°C) in areas where work is completed.
- Dirt, wetness and improper maintenance may cause significant variation in product appearance. Such variations do not affect product performance.
- Specifications are based on averages from normal manufacturing tolerances.
- This product is intended solely for use indoors and is not recommended or sold for any other purpose.
- Use entryway systems outside each entrance to prevent dirt, sand, grit and other substance from being tracked onto floor.