



Uninterrupted Collection

Mannington
COMMERCIAL



Cover: Wood - Heartwood Oak UN204, **Memento Modular** - Circular 52637
Above: Stone - Coastal Dune UN300



Stone - Carbonate UN306



Smooth Transitions


Uninterrupted LVT is thick enough to provide a seamless transition to carpet without the use of transition strips. This ensures a seamless, cohesive look in spaces with multiple flooring types, and with Mannington Commercial's wide array of visually stunning carpet coordinates, design possibilities are only limited by imagination.



- No transition strip needed between Uninterrupted LVT and carpet, creating a seamless, cohesive look
- Wood and stone visuals coordinate beautifully with Mannington Commercial's range of carpet collections
- Features Quantum Guard Elite® technology for best-in-class performance and durability

Uninterrupted Collection Coordinates

Uninterrupted LVT is designed to pair beautifully with a wide range of our collections, all while eliminating the need for transition strips to carpet. Uninterrupted’s versatile wood and stone visuals work with styles from classic to contemporary, and palettes from warm to cool. Without the visual break of a transition between the LVT and carpet, you can use the right type of flooring in each area of a space while maintaining a coherent design.



- | | |
|--|---|
| 1. Color Anchor, Stride, Crumb Cake | 5. Color Anchor, Orchard |
| 2. Heirloom, Memento, Circular | 6. Color Anchor, ColorScape, Beach Sand |
| 3. Uninterrupted, Wood, Harvest Walnut | |
| 4. Uninterrupted, Stone, Carbonate | |




Success Is in Our Science

Introducing an advancement in our proven Quantum Guard technology: Quantum Guard Elite. This patent pending technology provides the ultimate solution for all aspects of LVT performance.


- Highest scratch resistance in the industry
- Engineered for best-in-class dimensional stability
- Superior impact resistance
- Cuts cleanly for highest quality installation
- Easy no-polish maintenance significantly reduces overall life cycle cost and total cost of ownership
- Advanced stain resistance

Outperforms in Scratch Resistance

Quantum Guard Elite

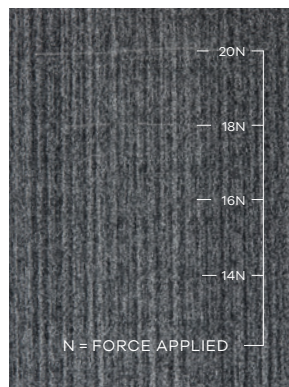


Leading Competitor

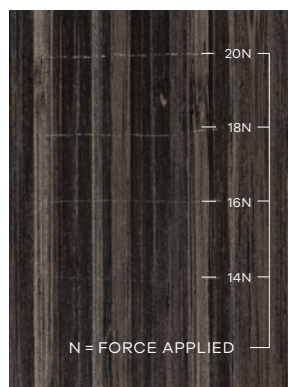

With a patent-pending two-part wear layer and aluminum oxide infused top coat, Quantum Guard Elite offers superior scratch resistance vs. the leading competitor.


Complete Multi-Layered Protection

Quantum Guard Elite combines a hard wear layer and a flexible wear layer for superior durability with the added protection of our proprietary aluminum oxide technology.

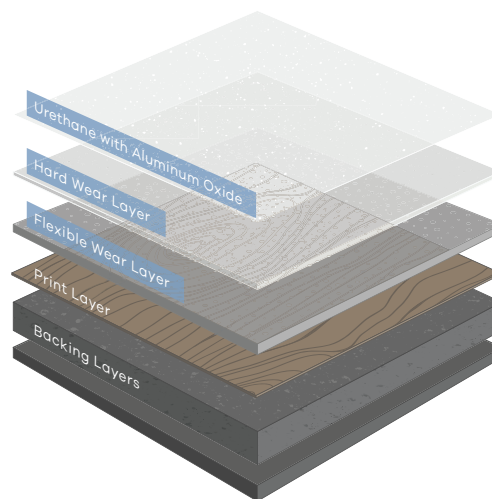


Best-in-Class Dimensional Stability

Quantum Guard Elite



Leading Competitor



LVT with Quantum Guard Elite is fully engineered to offer the perfect balance of hardness and flexibility, which helps prevent product failures in commercial environments. Products exposed to 80 °C for six hours.

Warranted to Work

Products with Quantum Guard Elite feature our Limited Quantum Guard Elite Wear Warranty and Limited Commercial Warranty.

Uninterrupted Collection Product Availability



Product Name	Product Code	Surface Finish - Barnwood	Surface Finish - Wood Tick	Surface Finish - Ceramic	Quantum Guard Elite®	7.25" x 48" (184 x 1219 mm)	12" x 24" (305 x 610 mm)
WOOD							
Earthy Chestnut	UN206	•			•	•	
Harvest Walnut	UN208		•		•	•	
Heartwood Oak	UN204	•			•	•	
Mocha Walnut	UN214		•		•	•	
Pearly Oak	UN200	•			•	•	
Russet Maple	UN210		•		•	•	
Sepia Maple	UN212		•		•	•	
Silvered Oak	UN202	•			•	•	
STONE							
Carbonate	UN306			•	•		•
Coastal Dune	UN300			•	•		•
Gravel	UN302			•	•		•
Weathered Shale	UN304			•	•		•

Uninterrupted Collection

Style	Uninterrupted - Stone	Uninterrupted - Wood
Construction	Luxury Vinyl Tile Non-ortho Phthalate	Luxury Vinyl Tile Non-ortho Phthalate
Classification	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B
Total Thickness	0.1575" (4.0 mm)	0.1575" (4.0 mm)
Wear Layer Thickness	20 mil (0.51 mm)	20 mil (0.51 mm)
Wear Layer	Quantum Guard Elite®	Quantum Guard Elite®
Edge Treatment	Micro-bevel	Micro-bevel
Sizes	12" x 24" (305 x 610 mm)	7.25" x 48" (184 x 1219 mm)
Colors	4	8
Packaging	11 pcs, 22 ft² (2.044 m²), 29.04 lbs (13.17 kg)	12 pcs, 29 ft² (2.694 m²), 38.28 lbs (17.36 kg)
Adhesive	Porous & Non-porous Substrates: V-95 Full Spread, 2-part Epoxy V-88 Full Spread, Transitional Pressure Sensitive, High Moisture XpressStep for LVT & Sheet Vinyl Full Coverage Spray XpressStep Premium for LVT Full Coverage High Moisture Spray Porous Substrates Only: V-82 Full Spread Note: Must use V-95, XpressStep or XpressStep Premium adhesive under hospital beds and heavy rolling load areas. Use V-95 where higher risk of topical moisture would be a concern.	
Installation Method	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered.	
Testing		
HUD/FHA	Passes	
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break	
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/in ft	
Squareness (ASTM F540)	Passes - Max 0.010"	
Static Load (ASTM F970 mod.)	Passes - 2,000 PSI; Residual Indent ≤ 0.005"	
Residual Indentation (ASTM F1914)	Passes - < 8% Avg / 10% Single Value	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber	
Resistance to Light (ASTM F1515)	Passes	
Chemical Resistance (ASTM F925)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Environmental Data		
Rapidly Renewable Content	Contains 2% rapidly renewable resource content	
Indoor Air Quality	FloorScore Certified; CDPH v1.1-2010	
Product Declarations	EPD, HPD	
LEED Scoreboard	May contribute to LEED credits: LEED 2009: MRc5 Regional Materials; MRc6 Rapidly Renewable Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information	
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered	
Warranty		
	Limited 15 Year Commercial Warranty Limited 15 Year Quantum Guard Elite® Wear Warranty	