


TELES







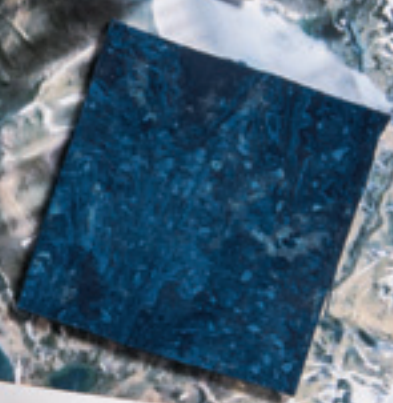

Self-Migrating Waxes



- Self-migrating waxes move up to the surface, maintaining a natural luster, eliminating the need for synthetic wax and reducing maintenance

10% Sustainable materials



Durable and Resilient

750 PSI



1500 PSI







All rubber is not created equal. Our Burke Industries Division has 50+ years of experience developing rubber compounds with unique performance characteristics. These formulations are created for a broad range of industries like energy, aerospace, automotive, and others. Utilizing this expertise, our chemists worked to develop a premium formulation for rubber flooring to provide exceptional, long-term appearance retention in the most demanding commercial applications. This proprietary rubber compound creates a smooth rubber tile with more than double the industry standard for indentation resistance. Teles rubber tile delivers — on durability, cleanability, indentation resistance, and styling.



**Cover: Monterey Bluff 994** (5.8" x 35.0" Plank), **Ivory Coast 855** (17.5" x 35.0" Rectangle), **Spanish Mesa 900** (35.0" x 35.0" Tile)

**Above: Deepwater Blue 995, Red Rock Canyon 996, Coastal Fog 851** (17.5" x 35.0" Rectangle)





**Cliffside 854** (17.5" x 17.5" Tile)





Great Lakes 997, Misty Bay 857, Rainforest Canopy 800 (5.8" x 35.0" Plank)



Misty Bay 857, Deepwater Blue 995, Dew Drop 850, Sun Shower 999, Rainforest Canopy 800 (17.5" x 17.5" Tile)












Great Lakes 997, Willow Grove 998, Beach Stone 853 (35.0" x 35.0" Tile)



PERFORMANCE AND FEATURES


	AVAILABLE SIZES	Available in 35.0" x 35.0" Tile, 17.5" x 35.0" Rectangle, 17.5" x 17.5" Tile and 5.8" x 35.0" Plank
	WARRANTY	This product is backed by our Limited 10 Year Commercial Warranty and Limited 10 Year Wear Warranty.
	SLIP RESISTANCE	This product meets or exceeds recommended ADA Guidelines.

SUSTAINABILITY

	ENERGY LEADERSHIP	With one of the largest solar arrays in the flooring industry (3.3 acres in Salem NJ) and ambitious goals to improve energy efficiency by 25% over ten years, we have an ongoing partnership with the Department of Energy to lead manufacturing into smarter energy use, as well as to reduce related carbon emissions..
	WATER REDUCTION	Water is a precious natural resource and a key component in manufacturing. By investing in technology and a continual emphasis on efficiency and lean manufacturing, we have reduced our water use by more than 35% since 2007. We also actively help protect wetlands in the communities where we make flooring.
	SOLAR ARRAY	At 3.3 acres, we have one of the largest solar arrays in the flooring industry generating 1,000,000 kilowatt hours annually.
	US MANUFACTURING	Mannington is a fourth generation, family-owned company deeply committed to U.S. manufacturing. We make flooring in eight communities across the U.S., allowing us to provide the highest levels of service and quality in the industry, while supporting local economies and crafting quality, American-made products.
	SAMPLE RETURN	We offer a postage-paid return label for every commercial product sample that we ship. So when you are finished with your project, you can return the sample. We will send it on to the next user; and at the end of its useful life, we donate samples to local charities, churches, schools and civic groups.
	ENVIRONMENTAL PRODUCT DECLARATION	EPDs communicate the comprehensive life cycle assessment of a product's environmental impact and facilitate transparency. Our EPDS conform to international standards and are 3rd party verified by SSC and NSF International.
	LEED	Mannington Commercial products may contribute to multiple LEED credits.



	3RD PARTY CERTIFICATIONS	Certifications help navigate the world of green marketing claims. So we invest in ISO-14001 and environmentally preferable product certifications including NSF/ANSI-140, NSF/ANSI-332, FloorScore, and Green Label Plus. Most of our products may contribute to multiple LEED and Green Globe credits.
	PURPLE MARTINS	In the mid-1980s, we began attracting migrating birds called Purple Martins to our New Jersey manufacturing campus as a more natural alternative to the use of pesticides. This “Purple Martin Project” has proven to be an incredibly environmentally friendly and cost effective way to control insects. Our employees are engaged in the banding and tracking of the birds.
	HONEYBEES	In 2009, as part of an effort to show how an industrial enterprise can co-exist with the agricultural & farming community and positively contribute to both, Mannington’s New Jersey corporate site began to house honeybees, and now have 5 hives in Salem, NJ and 4 in Eustis, FL. The honey bees are thriving and each year we are able to enjoy and share the honey we produce.
	CLIMATE REGISTRY	Mannington is dedicated to reducing our greenhouse gas emissions by 25% over 10 years. Since 2007, a 10% reduction can be attributed to energy efficiencies, process efficiencies, and use of renewable energy. Additional information can be found on <a href="http://theclimateregistry.org">theclimateregistry.org</a> .

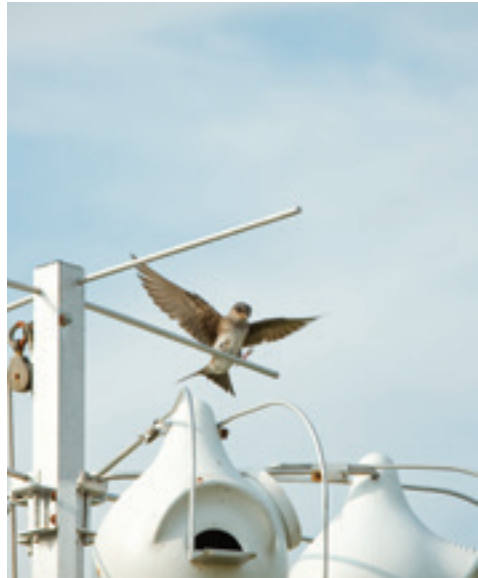

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and to avoid premature wear.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.



## SPECIFICATIONS

	CONSTRUCTION	High Resiliency Thermoset Rubber Plank & Tile
	AVAILABLE SIZES	35.0" x 35.0" (889 mm x 899 mm); 17.5" x 35.0" (445 mm x 889 mm); 17.5" x 17.5" (445 mm x 445 mm); 5.8" x 35.0" (148 mm x 889 mm)
	OVERALL THICKNESS	1/8" (3.2 mm)
	PIECES PER CARTON	10 per carton - 17.5" x 35.0"; 20 per carton - 17.5" x 17.5"; 25 per carton - 5.8" x 35.0" Individual pieces - 35.0" x 35.0" (minimums apply)
	COVERAGE PER CARTON	42.5" sq. ft. - 17.5" x 35.0" and 17.5" x 17.5"; 35.4 sq. ft. - 5.8" x 35.0"
	WEIGHT PER PIECE	8.5 lbs. (3.86 kg.) - 35.0" x 35.0"; 4.25 lbs. (1.93 kg.) - 17.5" x 35.0"; 2.13 lbs. (.97 kg.) - 17.5" x 17.5"; 1.4 lbs. (.64 kg.) - 5.8" x 35.0"
	WEIGHT PER CARTON	43 lbs. (19.5 kg.) - 17.5" x 35.0"; 43 lbs. (19.5 kg.) - 17.5" x 17.5"; 36 lbs. (16.33 kg.) - 5.8" x 35.0"
	CARTONS PER PALLET	16 - 17.5" x 35.0"; 32 - 17.5" x 17.5"; 36 - 5.8" x 35.0"
	3RD PARTY CERTIFICATIONS	FloorScore, Industry wide 3rd party Type III EPD (Environmental Product Declaration)
	WARRANTY	This product is backed by our Limited 10 Year Commercial Warranty and Limited 10 Year Wear Warranty.
	LEED	Mannington Commercial products may contribute to multiple LEED credits.
	US MANUFACTURING	Mannington is a fourth generation, family-owned company deeply committed to U.S. manufacturing. We make flooring in eight communities across the U.S., allowing us to provide the highest levels of service and quality in the industry, while supporting local economies and crafting quality, American-made products.
STATIC LOAD LIMIT		1,500 PSI
SPECIFICATION (ASTM F-1344)		Class 1, Type B
HEAT STABILITY (ASTM F-1514)		Passes
STAIN & CHEMICAL STABILITY (ASTM F-925)		Passes
HUD/FHA REQUIREMENTS		Exceeds
ADA		Meets or exceeds ADA Requirements
COEFFICIENT OF FRICTION		COF $\geq$ 0.6 Leather; 0.8 Neolite (Rubber)
FLOORING RADIANT PANEL TEST (ASTM-E-648)		Passes - Class 1
N.B.S. SMOKE CHAMBER TEST (ASTM-E-662)		< 450, Passes
INSTALLATION ADHESIVE		MR 911 - General Purpose Full-Spread Adhesive, Porous Subfloor; MR725 - General Purpose Full-Spread Adhesive, Porous & Non-Porous Subfloors; MR721 - Two Part Epoxy Full-Spread Adhesive, Under hospital beds and heavy rolling loads or where high performance is needed.

Floor designs copyrighted by Mannington Mills, Inc 2014. For complete specifications, visit [manningtoncommercial.com](http://manningtoncommercial.com)



**MANNINGTON**  
COMMERCIAL